




## iKey Popular Products



## desktop keyboards

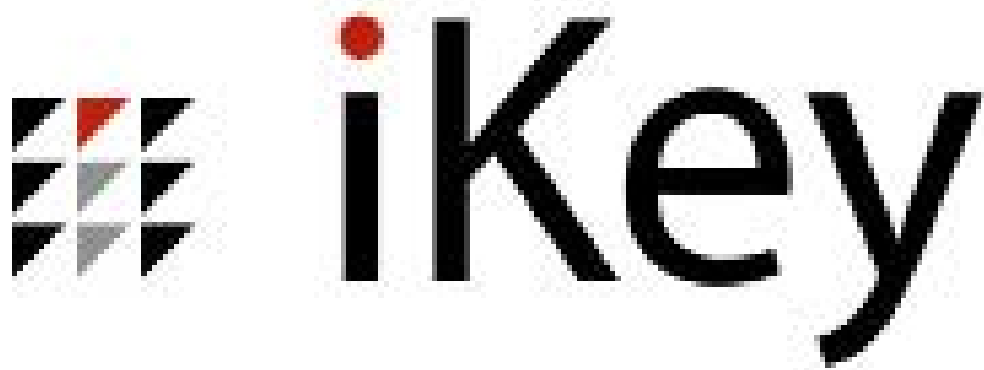

### DU-5K-TP2

DU-5K-TP2-PS2 | DU-5K-TP2-USB

- Integrated touchpad
- ABS polycarbonate case with mounting holes
- 24 function keys and 10 key numeric keypad



### DU-1000

DU-1000-PS2 | DU-1000-USB

- Polycarbonate case
- Mounting holes
- 12 function keys and 10 key numeric keypad



### DT-1000

DT-1000-PS2 | DT-1000-USB

- Silicone rubber keypad
- Stainless steel case
- 24 function keys and 10 key numeric keypad



### DT-2000

DT-2000-PS2 | DT-2000-USB

- Integrated Force Sensing Resistor
- Stainless steel case with optional mounting holes
- 24 function keys and 10 key numeric keypad



### DT-2000-TB

DT-2000-TB-PS2 | DT-2000-TB-USB

- Silicone rubber pad and stainless steel case
- Integrated 38-mm laser trackball
- Stainless steel switches with left and right click functions and a programmable third button



### DBL-810-TB

DBL-810-TB-PS2 | DBL-810-TB-USB  
DT-810-TB-PS2 | DT-810-TB-USB

- Integrated trackball
- Green LED backlight (DBL-810-TB)
- Industrial silicone rubber pad with a stainless steel case

## desktop keyboards



### SL-88

SL-88-PS2 | SL-88-USB  
DP-88-PS2 | DP-88-USB

- ABS polycarbonate case
- Red LED backlight (SL-88)
- 88 key functionality and 12 function keys



### DU-5K-TB

DU-5K-TB-PS2 | DU-5K-TB-USB

- Mounting holes
- Integrated 25-mm laser trackball
- ABS polycarbonate case and silicone rubber pad



### SLK-77

SLK-77-USB

- Red backlit keys
- Small footprint design
- Silicone rubber pad and ABS polycarbonate case



### SLK-101

SLK-101-PS2 | SLK-101-USB  
SK-101-PS2 | SK-101-USB

- Red LED backlight (SLK-101)
- Microsoft Windows function keys
- 10 key numeric pad



### SLK-102

SLK-102-PS2 | SLK-102-USB  
SK-102-PS2 | SK-102-USB

- Integrated Force Sensing Resistor
- LED backlight (SLK-102)
- 12 function keys



### SLK-102-TP

SLK-102-TP-PS2 | SLK-102-TP-USB  
SK-102-TP-PS2 | SK-102-TP-USB

- Integrated touchpad
- Low profile keys for cleaning
- Red LED backlight (SLK-102-TP)

## desktopkeyboards



### DBL-81

DBL-81-PS2 | DBL-81-USB

DT-81-PS2 | DT-81-USB

- LED backlight (DBL-81)
- Stainless steel case
- 12 function keys



### DT-810

DT-810-PS2 | DT-810-USB

DBL-810-PS2 | DBL-810-USB

- Stainless steel case
- Integrated Force Sensing Resistor
- Fn key for secondary legend flexibility
- LED backlight (DBL-810)



### DT-5K-MEM-TP

DT-5K-MEM-TP-PS2 | DT-5K-MEM-TP-USB

- Desktop membrane
- Integrated touchpad in stainless steel case
- Hardcoated, textured polyester film



### DU-5K

DU-5K-PS2 | DU-5K-USB

- Polycarbonate case with mounting holes
- Integrated Force Sensing Resistor
- NEMA 4X



### DT-5K

DT-5K-PS2 | DT-5K-USB

- Integrated Force Sensing Resistor
- Stainless steel case
- 20 function keys and 10 key numeric keypad



### SLP-101

SLP-101-PS2 | SLP-101-USB  
PM-101-PS2 | PM-101-USB

- Large numeric pad
- Polycarbonate case
- LED backlight (SLP-101)



### SLP-102

SLP-102-PS2 | SLP-102-USB  
PM-102-PS2 | PM-102-USB

- Integrated Force Sensing Resistor
- LED backlight (SLP-102)
- Industrial silicone rubber pad and ABS polycarbonate case



### SLP-102-TP

SLP-102-TP-PS2 | SLP-102-TP-USB  
PM-102-TP-PS2 | PM-102-TP-USB

- Low profile keys for easy cleaning
- Microsoft Windows function keys
- Integrated backlighting (SLP-102-TP)



### PM-5K

PM-5K-PS2 | PM-5K-USB

- Stainless steel case
- Integrated Force Sensing Resistor
- 10 key numeric pad and 20 function keys



### PMU-5K

PMU-5K-PS2 | PMU-5K-USB

- Integrated Force Sensing Resistor
- 24 function keys
- ABS polycarbonate frame with 8-32 mounting studs



### PMU-5K-TP2

PMU-5K-TP2-PS2 | PMU-5K-TP2-USB

- Integrated touchpad with right and left click buttons
- ABS polycarbonate frame with 8-32 mounting studs
- 24 function keys

## panelmountkeyboards



### PM-81

PM-81-PS2 | PM-81-USB  
SLP-81-PS2 | SLP-81-USB

- Integrated backlighting (SLP-81)
- 12 function keys and 81-key functionality
- Industrial silicone rubber pad



### PM-65-TP-SS

PM-65-TP-SS-USB

- Low profile stainless steel keys
- Integrated touchpad and programmable function keys
- Vandal proof design



### PM-65-TB-SS

PM-65-TB-SS-USB

- Integrated industrial trackball
- Stainless steel keys and programmable function keys
- Vandal proof design



### PM-1000

PM-1000-PS2 | PM-1000-USB

- Stainless steel case
- 24 function keys
- 114-key functionality and 10-key numeric pad



### PM-2000

PM-2000-PS2 | PM-2000-USB

- Integrated Force Sensing Resistor
- Stainless steel case and industrial silicone rubber pad
- 24 function keys



### PM-2000-TB

PM-2000-TB-PS2 | PM-2000-TB-USB

- Integrated laser trackball
- Two rows of function keys
- Stainless steel case and industrial silicone rubber pad

## panelmountkeyboards



### PM-5K-MEM-TP

PM-5K-MEM-TP-PS2 | PM-5K-MEM-TP-USB

- Integrated Synaptics touchpad
- Hardcoated textured polyester film
- 10 key numeric pad
- 24 function keys



### SLP-86-911

SLP-86-911-PS2 | SLP-86-911-USB

- Integrated Force Sensing Resistor
- Integrated LED backlit keys
- One-touch emergency key



### PM-72

PM-72-PS2 | PM-72-USB

- Alphabetic and color oversized keys
- 8 function keys
- Roomy layout for glove users



### PMU-1000

PMU-1000-PS2 | PMU-1000-USB

- 12 function keys and 104 key functionality
- NEMA 4X
- Easy integration into workstations



### SLP-88

SLP-88-PS2 | SLP-88-USB  
PM-88-PS2 | PM-88-USB

- ABS polycarbonate frame with 4-40 mounting studs
- 88-key functionality
- Includes secondary legend



### SLP-91

SLP-91-PS2 | SLP-91-USB

- Epoxy coated keys
- Integrated backlighting
- ABS polycarbonate frame with 4-40 mounting studs



### PM-18

PM-18-PS2 | PM-18-USB

- NumLock key for secondary keyboard
- Stainless steel bezel
- 18 key numeric pad



### PM-18-HP

PM-18-HP-PS2 | PM-18-HP-USB

- Integrated HulaPoint™ pointing device
- NumLock key for secondary keyboard
- Stainless steel bezel

## wirelesskeyboards



### BT-87-TP

- Wireless Bluetooth®-compatible
- Built in mounting holes
- Integrated touchpad
- ABS polycarbonate case



### BT-80-02

- Bluetooth® wireless technology
- Red LED backlight
- Windows 8 compatibility
- Windows 8 integrated hot keys



### BT-80-TP

- Wireless Bluetooth®-compatible
- Integrated backlighting
- Integrated touchpad
- ABS polycarbonate case



### BT-80-03

- Bluetooth® wireless technology
- Red LED backlight
- Windows/Android compatibility
- VESA mounting pattern

## medicalkeyboards



### SBW-97-TP

- Rechargeable, wireless keyboard
- Integrated Touchpad
- Built-in mounting holes
- CleanLock™ key



### SLK-101-FL

#### SLK-101-FL-USB

- Liquid-proof design
- Integrated backlighting
- Low profile keys



### SLK-102-TP-FL

#### SLK-102-TP-FL-USB

- Integrated GlidePoint™ touchpad
- Red LED backlit keys
- Liquid-proof design



### SLK-97-TP

#### SLK-97-TP-USB

- Red LED backlit keys
- Cleanable, liquidproof design
- Integrated touchpad



### SB-97-TP

#### SB-97-TP-USB

- Backlit keys
- 10-key numeric pad
- Integrated touchpad



### SB-87-TP

#### SB-87-TP-USB

- Integrated touchpad
- Red LED backlit keys
- Ultra-thin design



### DP-72

DP-72-PS2 | DP-72-USB

- 8 function keys
- ABS polycarbonate case with mounting holes
- Alphabetical and color oversized keys



### SL-75

SL-75-PS2 | SL-75-USB

- Silicone rubber keypad
- Black aluminum case
- Red LED backlit keys



### SLK-77-M

SLK-77-M-USB

- Ultrasmall foot-print design
- Integrated mounting holes
- LED backlighting



### SL-91

SL-91-PS2 | SL-91-USB

- Epoxy-coated keys
- Built-in mounting holes
- Integrated backlighting



### SLK-101-M

SLK-101-M-PS2 | SLK-101-M-USB  
SK-101-M-PS2 | SK-101-M-USB

- Red LED backlight (SLK-101-M)
- Microsoft Windows function keys
- Built-in mounting holes



### SLK-102-M

SLK-102-M-PS2 | SLK-102-M-USB  
SK-102-M-PS2 | SK-102-M-USB

- Integrated Force Sensing Resistor
- Integrated backlighting (SLK-102-M)
- Polycarbonate case with mounting holes

## mobilekeyboards



### SLK-102-TP-M

SLK-102-TP-M-PS2 | SLK-102-TP-M-USB

- Mobile mounting holes
- Integrated backlighting
- Integrated GlidePoint™ touchpad



### IK-TR-911

IK-TR-911-USB

- One-touch emergency key
- Backlit keys
- Integrated touchpad
- Mobile mounting holes



### SL-86-911

SL-86-911-PS2 | SL-86-911-USB

- Integrated Force Sensing Resistor
- Red LED backlit keys
- 86-key functionality and 12 function keys



### SL-86-911-TP

SL-86-911-TP-PS2 | SL-86-911-TP-USB

- Integrated touchpad
- Backlit keys
- One-touch emergency key
- Mounting holes



### FT-88-911-TP

FT-88-911-TP-PS2 | FT-88-911-TP-USB

- One-touch emergency key
- Backlit keys
- Integrated touchpad
- Mobile mounting holes

## rackdrawerkeyboards



### RDC-1000

RDC-1000-PS2 | RDC-1000-USB

- Slide load rating: 130 Lbs/pair
- Drawer: CRS steel construction
- Industrial silicone rubber keypad with 114 keys



### RDC-3000

RDC-3000-PS2 | RDC-3000-USB

- Integrated Force Sensing Resistor
- Drawer: CRS steel construction
- Slide load rating: 130 Lbs/pair



### RDC-1535

RDC-1535-PS2

- Integrated Force Sensing Resistor
- Drawer: CRS steel construction
- Slide load rating: 130 Lbs/pair



### RDC-5K

RDC-5K-PS2 | RDC-5K-USB

- Drawer: CRS steel construction
- Integrated Force Sensing Resistor
- Slide load rating: 130 Lbs/pair

## militarykeyboards



### SL-86-911-461

SL-86-911-461-PS2

- 461E military standard approved
- Green backlit keys
- Integrated Force Sensing Resistor
- Mounting holes
- One-touch blackout key



### SL-88-NV

SL-88-NV-PS2 | SL-88-NV-USB

- Polycarbonate case with mounting holes
- NVIS-compliant Green B backlighting
- 88-key functionality



### SLK-880-FSR

SLK-880-FSR-USB

- Adjustable green backlighting
- Integrated Force Sensing Resistor
- Cable strain relief exceeds 25 pound pull limits



### AK-39

AK-39-USB

- Wearable design
- Snap-on faceplate
- Integrated Force Sensing Resistor



### DU-5K-OEM

DU-5K-OEM-PS2 | DU-5K-OEM-USB

- Integrated Force Sensing Resistor
- NEMA 4X
- 10-key numeric pad



### KYB-5K-MEM-TP-OEM

KYB-5K-MEM-TP-OEM-PS2 |  
KYB-5K-MEM-TP-OEM-USB

- Hardcoated textured polyester film
- Integrated touchpad
- 10-key numeric pad and 24 function keys



### MEM-114-OEM

MEM-114-OEM-PS2 |  
MEM-114-OEM-USB

- Membrane keypad and switch matrix board
- OEM Kit: PCB, hard coated polyester film overlay, and cable



### SL-75-OEM

SL-75-OEM-PS2 | SL-75-OEM-USB

- Red LED backlit keys
- NEMA 4X
- 75 keys and 12 function keys



### SL-86-911-OEM

SL-86-911-OEM-PS2  
SL-86-911-OEM-USB

- Integrated Force Sensing Resistor
- OEM Kit: PCB, rubber overlay, and cable
- One-touch emergency key



### SL-88-OEM

SL-88-OEM-PS2 | SL-88-OEM-USB  
DP-88-OEM-PS2 | DP-88-OEM-USB

- Integrated backlighting (SL-88-OEM)
- 12 function keys and 88-key functionality
- Industrial silicone rubber

## oemkeyboardkits



### KYB-18-OEM

KYB-18-OEM-PS2 | KYB-18-OEM-USB

- Industrial silicone rubber
- Numeric keypad
- NumLock Key for secondary keyboard

## oempointingdevices



### HP-1330

HP-1330-PS2 | HP-1330-USB

- Force Sensing Resistor
- OEM Kit: PCB, rubber overlay, and cable
- Sealed design



### uHP-1535

uHP-1535-PS2

- Force Sensing Resistor
- OEM Kit: PCB, rubber overlay, and cable
- Sealed design



### HP-OEM

HP-OEM-PS2 | HP-OEM-USB

- OEM Kit: PCB, rubber overlay, and cable
- NEMA 4X design
- Contains no protruding parts that might break and no moving elements to collect dust



### DT-TB

DT-TB-PS2 | DT-TB-USB

- Adjustable tension ring
- Polycarbonate housing with a stainless steel case
- Removable ball
- Sealed stainless steel switches, including a programmable button



### HP-DT

HP-DT--PS2 | HP-DT-USB

- Stainless steel case
- Improved sensitivity and increased durability
- Provides pressure-sensitive feedback for positive motion control without requiring vigorous movement



### HP-PM

HP-PM-PS2 | HP-PM-USB

- Stainless steel bezel
- NEMA 4X
- Improved sensitivity and increased durability
- Contains no protruding parts and no moving elements



### PM-TB

PM-TB-PS2 | PM-TB-USB

- Adjustable tension ring
- Stainless steel bezel
- Removable ball



### DT-OM-FL

DT-OM-FL-USB

- Liquidproof pointing device
- ABS polycarbonate case and industrial silicone overlay
- Ergonomic design



### DT-OM

DT-OM-FL-USB

- Ergonomic design
- Industrial silicone overlay and robust polycarbonate frame
- Smooth surface buttons



### DT-1000-NI

#### DT-1000-IS

- Silicone rubber keypad
- Stainless steel case
- 24 function keys and 10 key numeric keypad
- NI Model: Class I, Div II
- IS Model: Class I, II and III, Div I



### DT-2000-NI

#### DT-2000-IS

- Integrated HulaPoint II™
- Stainless steel case with optional mounting holes available
- 24 function keys and 10 key numeric keypad
- NI Model: Class I, Div II
- IS Model: Class I, II and III, Div I



### PM-1000-NI

#### PM-1000-IS

- Stainless steel case
- 24 function keys
- 114-key functionality and 10-key numeric pad
- NI Model: Class I, Div II
- IS Model: Class I, II and III, Div I



### HP-DT-NI

#### HP-DT-IS

- Stainless steel case
- HulaPoint II™
- NEMA 4X design
- NI Model: Class I, Div II
- IS Model: Class I, II and III, Div I



### BT-87-TP-NI

#### BT-87-TP-IS

- Wireless Bluetooth®-compatible
- Built in mounting holes
- Integrated touchpad
- ABS polycarbonate case
- NI Model: Class I, Div II
- IS Model: Class I, II and II, Div I



### DT-102-ATEX

#### DT-102-AT2

- Integrated touchpad
- Stainless steel keys and case
- Virtually indestructible and tamper proof
- ATEX Zone 0 (AT0)
- ATEX Zone 2 (AT2)

| Product Name            | Dimensions (W-H-D)                              | Storage Temperature | Operating Temperature | Integrated Pointer     | Backlighting | Function Keys | Cable               | Key Type                           | 10-Key # Pad | Mountable | Other Special Features        |
|-------------------------|-------------------------------------------------|---------------------|-----------------------|------------------------|--------------|---------------|---------------------|------------------------------------|--------------|-----------|-------------------------------|
| DU-5K-TP2               | 14.94" x 6.63" x 1.81"                          | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | N            | 24            | PS2, USB            | Silicone Rubber                    | Y            | Y         | NEMA 4X                       |
| DU-1000                 | 14.94" x 6.63" x 1.81"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 12            | PS2, USB            | Silicone Rubber                    | Y            | Y         | 104-key functionality         |
| DT-1000                 | 16.25" x 7.88" x 1.80"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 24            | PS2, USB, AT/Serial | Silicone Rubber                    | Y            | N         | 114-key functionality         |
| DT-2000                 | 20.25" x 7.88" x 1.80"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 24            | PS2, USB, AT/Serial | Silicone Rubber                    | Y            | Y         | Stainless Steel Case          |
| DT-2000-TB              | 20.25" x 7.9" x 2.2"                            | -40°C to +85°C      | 0°C to +70°C          | Trackball              | N            | 24            | PS2, USB            | Silicone Rubber                    | Y            | N         | Stainless Steel Case          |
| DBL-810-TB<br>DT-810-TB | 14.80" x 5.72" x 1.32" / 14.80" x 5.72" x 1.69" | -40°C to +85°C      | 0°C to +65°C          | Trackball              | DBL-810-TB   | 12            | PS2, USB            | Silicone Rubber                    | N            | N         | Stainless Steel Case          |
| SL-88<br>DP-88          | 11.40" x 6.30" x 1.86"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | SL-88        | 12            | PS2, USB            | Silicone Rubber                    | N            | Y         | 88-key functionality          |
| DU-5K-TB                | 14.94" x 6.63" x 1.81"                          | -40°C to +85°C      | 0°C to +65°C          | Trackball              | N            | 24            | PS2, USB            | Silicone Rubber                    | Y            | Y         | 3 keys above trackball        |
| SLK-77                  | 9.27" x 3.87" x 0.90"                           | -40°C to +90°C      | -40°C to +70°C        | N                      | Y            | 12            | USB                 | Silicone Rubber                    | N            | N         | NEMA 4X                       |
| SLK-101<br>SK-101       | 14.60" x 5.55" x 0.92"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | SLK-101      | 12            | PS2, USB            | Silicone Rubber                    | Y            | N         | Slim, compact design          |
| SLK-102<br>SK-102       | 14.60" x 5.55" x 1.05"                          | -40°C to +90°C      | -40°C to +70°C        | Force Sensing Resistor | SLK-102      | 12            | PS2, USB            | Silicone Rubber                    | Y            | N         | MS Windows function keys      |
| SLK-102-TP<br>SK-102-TP | 14.60" x 5.55" x 0.91" / 14.60" x 5.55" x 0.93" | -40°C to +65°C      | 0°C to +60°C          | GlidePoint™ Touchpad   | SLK-102-TP   | 12            | PS2, USB            | Silicone Rubber                    | Y            | N         | MS Windows function keys      |
| DBL-81<br>DT-81         | 13.25" x 6.94" x 1.75"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | DBL-81       | 12            | PS2, USB, AT/Serial | Silicone Rubber                    | N            | N         | Stainless Steel Case          |
| DBL-810<br>DT-810       | 16.12" x 7.02" x 1.74"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | DBL-810      | 12            | PS2, USB            | Silicone Rubber                    | N            | N         | Stainless Steel Case          |
| DT-5K-MEM-TP            | 16.25" x 7.88" x 1.80"                          | -40°C to +65°C      | 0°C to +60°C          | Touchpad               | N            | 24            | PS2, USB            | Hardcoated Textured Polyester Film | Y            | N         | Stainless Steel Case          |
| DU-5K                   | 14.94" x 6.63" x 1.81"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 12            | PS2, USB            | Silicone Rubber                    | Y            | Y         | 116-key functionality         |
| DT-5K                   | 16.25" x 7.88" x 1.80"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 20            | PS2, USB            | Silicone Rubber                    | Y            | N         | MS Windows keys               |
| SLP-101<br>PM-101       | 15.10" x 6.05" x 0.58"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | SLP-101      | 12            | PS2, USB            | Silicone Rubber                    | Y            | Y         | NEMA 4X                       |
| SLP-102<br>PM-102       | 15.10" x 6.05" x 0.59" / 15.10" x 6.05" x 1.22" | -40°C to +90°C      | -40°C to +70°C        | Force Sensing Resistor | SLP-102      | 12            | PS2, USB            | Silicone Rubber                    | Y            | Y         | Cleanable, liquidproof design |
| SLP-102-TP<br>PM-102-TP | 15.10" x 6.05" x 0.58" / 15.10" x 6.05" x 0.59" | -40°C to +65°C      | 0°C to +60°C          | GlidePoint™ Touchpad   | SLP-102-TP   | 12            | PS2, USB            | Silicone Rubber                    | Y            | Y         | NEMA 4X                       |
| PM-5K                   | 17.70" x 9.20" x 1.58"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 20            | PS2, USB            | Silicone Rubber                    | Y            | Y         | Stainless Steel Case          |
| PMU-5K                  | 15.39" x 7.06" x 0.62"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 24            | PS2, USB            | Silicone Rubber                    | Y            | Y         | 8-32 mounting studs           |

| Product Name  | Dimensions (W-H-D)     | Storage Temperature | Operating Temperature | Integrated Pointer     | Backlighting | Function Keys | Cable                 | Key Type                           | 10-Key # Pad | Mountable | Other Special Features        |
|---------------|------------------------|---------------------|-----------------------|------------------------|--------------|---------------|-----------------------|------------------------------------|--------------|-----------|-------------------------------|
| PMU-5K-TP2    | 15.39" x 7.06" x 0.50" | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | N            | 24            | PS2, USB              | Silicone Rubber                    | Y            | Y         | MS Windows function keys      |
| PM-81 SLP-81  | 14.05" x 7.81" x 1.58" | -40°C to +90°C      | -40°C to +70°C        | N                      | SLP-81       | 12            | PS2, USB, AT/Serial   | Silicone Rubber                    | N            | Y         | Stainless Steel Case          |
| PM-65-TP-SS   | 16.25" x 5.11" x 1.25" | -40°C to +90°C      | -40°C to +60°C        | Touchpad, two buttons  | N            | 0             | USB                   | Stainless Steel                    | N            | Y         | Vandal Proof Design           |
| PM-65-TB-SS   | 16.25" x 5.12" x 1.12" | -40°C to +90°C      | -40°C to +60°C        | Trackball              | N            | 0             | USB                   | Stainless Steel                    | N            | N         | Vandal Proof Design           |
| PM-1000       | 17.70" x 9.20" x 1.58" | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 24            | PS2, USB, AT/Serial   | Silicone Rubber                    | Y            | Y         | Stainless Steel Case          |
| PM-2000       | 21.80" x 9.20" x 0.28" | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 24            | PS2, USB, AT/Serial   | Silicone Rubber                    | Y            | Y         | Stainless Steel Case          |
| PM-2000-TB    | 21.80" x 9.20" x 0.44" | -40°C to +85°C      | 0°C to +55°C          | Trackball              | N            | 24            | PS2, USB              | Silicone Rubber                    | Y            | Y         | 114-key functionality         |
| PM-5K-MEM-TP  | 17.70" x 9.20" x 1.58" | -40°C to +65°C      | 0°C to +60°C          | Touchpad               | N            | 24            | PS2, USB              | Hardcoated Textured Polyester Film | Y            | Y         | Stainless Steel Case          |
| SLP-86-911    | 11.80" x 6.79" x 1.35" | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | Y            | 12            | PS2, USB              | Silicone Rubber                    | N            | Y         | One-touch emergency key       |
| PM-72         | 11.80" x 6.79" x 1.36" | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 8             | PS2, USB              | Silicone Rubber                    | Y            | Y         | Color keys                    |
| PMU-1000      | 15.39" x 7.06" x 1.25" | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 12            | PS2, USB, AT/Serial   | Silicone Rubber                    | Y            | Y         | 104-key functionality         |
| SLP-88 PM-88  | 11.80" x 6.79" x 1.35" | -40°C to +90°C      | -40°C to +70°C        | N                      | SLP-88       | 12            | PS2, USB              | Silicone Rubber                    | N            | Y         | 88-key functionality          |
| SLP-91        | 11.80" x 6.79" x 0.70" | -40°C to +90°C      | -40°C to +70°C        | N                      | Y            | 24            | PS2, USB              | Silicone Rubber                    | Y            | Y         | Epoxy coated keys             |
| PM-18         | 5.85" x 7.05" x 0.20"  | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 0             | PS2, USB, AT/Serial   | Silicone Rubber                    | Y            | Y         | Stainless Steel Case          |
| PM-18-HP      | 5.85" x 8.51" x 0.31"  | -40°C to +65°C      | 0°C to +60°C          | HulaPoint™             | N            | 0             | PS2, USB, AT/Serial   | Silicone Rubber                    | Y            | Y         | Stainless Steel Case          |
| BT-87-TP      | 12.01" x 7.75" x 2.03" | -40°C to +65°C      | 0°C to +60°C          | Touchpad, two buttons  | N            | 12            | Bluetooth®, Wireless  | Silicone Rubber                    | N            | Y         | NEMA 4X                       |
| BT-80-02      | 5.78" x 11.58" x 0.87" | -40°C to +70°C      | -20°C to +60°C        | N                      | Y            | 0             | Bluetooth®, Wireless  | Silicone Rubber                    | N            | Y         | Windows 8 hot keys            |
| BT-80-TP      | 10.04" x 7.41" x 0.71" | -40°C to +70°C      | -20°C to +60°C        | Touchpad, two buttons  | Y            | 12            | Bluetooth®, Wireless  | Silicone Rubber                    | N            | Y         | NEMA 4X                       |
| BT-80-03      | 5.78" x 11.58" x 0.87" | -40°C to +70°C      | -20°C to +60°C        | N                      | Y            | 12            | Bluetooth®, Wireless  | Silicone Rubber                    | N            | Y         | Windows/Android               |
| SBW-97-TP     | 14.96" x 5.91" x 0.84" | -40°C to +70°C      | -20°C to +60°C        | Touchpad, two buttons  | Y            | 12            | Rechargeable Wireless | Silicone Rubber                    | Y            | N         | CleanLock™ key                |
| SLK-101-FL    | 14.85" x 5.87" x 0.88" | -40°C to +90°C      | -40°C to +60°C        | N                      | Y            | 12            | USB                   | Silicone Rubber                    | Y            | N         | Cleanable, liquidproof design |
| SLK-102-TP-FL | 14.85" x 5.87" x 0.86" | -40°C to +65°C      | 0°C to +60°C          | GlidePoint™ Touchpad   | Y            | 12            | USB                   | Silicone Rubber                    | Y            | N         | Cleanable, liquidproof design |

| Product Name          | Dimensions (W-H-D)                              | Storage Temperature | Operating Temperature | Integrated Pointer     | Backlighting | Function Keys | Cable               | Key Type                  | 10-Key # Pad | Mountable | Other Special Features          |
|-----------------------|-------------------------------------------------|---------------------|-----------------------|------------------------|--------------|---------------|---------------------|---------------------------|--------------|-----------|---------------------------------|
| SLK-97-TP             | 14.44" x 5.40" x 0.89"                          | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | Y            | 12            | USB                 | Silicone Rubber           | Y            | N         | Cleanable, liquidproof design   |
| SB-97-TP              | 14.934" x 5.89" x 0.50"                         | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | Y            | 12            | USB                 | Silicone Rubber           | Y            | N         | NEMA 4X                         |
| SB-87-TP              | 11.83" x 7.73" x 0.56"                          | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | Y            | 12            | USB                 | Silicone Rubber           | N            | N         | Ultra-thin design               |
| DP-72                 | 11.40" x 6.30" x 1.86"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 8             | PS2, USB            | Silicone Rubber           | Y            | Y         | Color keys                      |
| SL-75                 | 8.25" x 4.34" x 1.08"                           | -40°C to +90°C      | -40°C to +70°C        | N                      | Y            | 12            | PS2, USB            | Silicone Rubber           | N            | N         | NEMA 4X                         |
| SLK-77-M              | 9.31" x 3.88" x 1.61"                           | -40°C to +90°C      | -40°C to +70°C        | N                      | Y            | 12            | USB                 | Silicone Rubber           | N            | Y         | Ultra-small footprint design    |
| SL-91                 | 11.40" x 6.30" x 1.90"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | Y            | 24            | PS2, USB            | Silicone Rubber           | Y            | Y         | Epoxy-coated keys               |
| SLK-101-M<br>SK-101-M | 14.74" x 5.69" x 1.64" / 14.50" x 5.50" x 1.56" | -40°C to +90°C      | -40°C to +70°C        | N                      | SLK-101-M    | 12            | PS2, USB            | Silicone Rubber           | Y            | Y         | MS Windows function keys        |
| SLK-102-M<br>SK-102-M | 14.74" x 5.69" x 1.64" / 14.50" x 5.50" x 1.56" | -40°C to +90°C      | -40°C to +70°C        | Force Sensing Resistor | SLK-102-M    | 12            | PS2, USB            | Silicone Rubber           | Y            | Y         | MS Windows function keys        |
| SLK-102-TP-M          | 14.74" x 5.69" x 1.65"                          | -40°C to +65°C      | 0°C to +60°C          | GlidePoint™ Touchpad   | Y            | 12            | PS2, USB            | Silicone Rubber           | Y            | Y         | MS Windows function keys        |
| IK-TR-911             | 11.92" x 7.65" x 1.23"                          | -40°C to +75°C      | -20°C to +60°C        | GlidePoint™ Touchpad   | Y            | 12            | USB                 | Full Travel Keyboard      | N            | Y         | One-touch emergency key         |
| SL-86-911             | 11.40" x 6.30" x 1.86"                          | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | Y            | 12            | PS2, USB            | Silicone Rubber           | N            | Y         | One-touch emergency key         |
| SL-86-911-TP          | 11.39" x 7.30" x 1.87"                          | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | Y            | 12            | PS2, USB            | Silicone Rubber           | N            | Y         | One-touch emergency key         |
| FT-88-911-TP          | 11.94" x 7.69" x 1.20"                          | -40°C to +90°C      | -40°C to +70°C        | Touchpad, two buttons  | Y            | 12            | PS2, USB            | ABS polycarbonate plastic | N            | Y         | One-touch emergency key         |
| RDC-1000              | 19" x 15" x 1.75"                               | -40°C to +90°C      | -40°C to +70°C        | N                      | N            | 24            | PS2, USB, AT/Serial | Silicone Rubber           | Y            | N         | Slide Load Rating: 130 Lbs/Pair |
| RDC-1535              | 19" x 15" x 1.75"                               | -40°C to +90°C      | -40°C to +60°C        | Force Sensing Resistor | N            | 12            | PS2                 | Silicone Rubber           | Y            | N         | Slide Load Rating: 130 Lbs/Pair |
| RDC-3000              | 19" x 15" x 1.75"                               | -40°C to +90°C      | -40°C to +70°C        | Force Sensing Resistor | N            | 24            | PS2, USB, AT/Serial | Silicone Rubber           | Y            | N         | Slide Load Rating: 130 Lbs/Pair |
| RDC-5K                | 19" x 15" x 1.75"                               | -40°C to +70°C      | -20°C to +60°C        | Force Sensing Resistor | N            | 20            | PS2, USB, AT/Serial | Silicone Rubber           | Y            | N         | Slide Load Rating: 130 Lbs/Pair |
| SL-86-911-461         | 11.40" x 6.30" x 1.86"                          | -40°C to +90°C      | -40°C to +70°C        | Force Sensing Resistor | Y            | 12            | PS2                 | Silicone Rubber           | N            | Y         | One-touch blackout key          |
| SL-88-NV              | 11.40" x 6.30" x 1.86"                          | -40°C to +90°C      | -40°C to +70°C        | N                      | Y            | 12            | PS2, USB            | Silicone Rubber           | N            | Y         | NVIS Compliant                  |
| SLK-880-FSR           | 11.45" x 6.84" x 1.15"                          | -40°C to +75°C      | -40°C to +70°C        | Force Sensing Resistor | Y            | 12            | USB                 | Silicone Rubber           | Y            | Y         | Optional NVIS                   |
| AK-39                 | 6.65" x 3.06" x 0.81"                           | -40°C to +75°C      | -40°C to +80°C        | Force Sensing Resistor | Y            | 0             | USB                 | Silicone Rubber           | N            | N         | Snap-on faceplate               |

| Product Name            | Dimensions (W-H-D)                              | Storage Temperature              | Operating Temperature            | Integrated Pointer     | Backlighting | Function Keys | Cable                  | Key Type                           | 10-Key # Pad | Mountable | Other Special Features             |
|-------------------------|-------------------------------------------------|----------------------------------|----------------------------------|------------------------|--------------|---------------|------------------------|------------------------------------|--------------|-----------|------------------------------------|
| DU-5K-OEM               | 14.75" x 6.43" x 0.35"                          | -40°C to +85°C                   | -20°C to +60°C                   | Force Sensing Resistor | N            | 24            | PS2, USB               | Silicone Rubber                    | Y            | Y         | NEMA 4X                            |
| KYB-5K-MEM-TP-OEM       | 15.06" x 6.55" x 0.53"                          | -40°C to +65°C                   | 0°C to +60°C                     | Touchpad, two buttons  | N            | 24            | PS2, USB               | Hardcoated Textured Polyester Film | Y            | N         | NEMA 4X                            |
| MEM-114-OEM             | 15" x 6.25" x 0.75"                             | -40°C to +90°C                   | -40°C to +70°C                   | N                      | N            | 24            | PS2, USB, AT/Serial    | Harcoated Polyester Film           | Y            | N         | NEMA 4X                            |
| SL-75-OEM               | 7.85" x 3.85" x 0.36"                           | -40°C to +90°C                   | -40°C to +70°C                   | N                      | Y            | 12            | PS2, USB, AT/Serial    | Silicone Rubber                    | N            | Y         | NEMA 4X                            |
| SL-86-911-OEM           | 11.12" x 6.05" x 0.72"                          | -40°C to +70°C                   | -20°C to +60°C                   | Force Sensing Resistor | Y            | 12            | PS2, USB               | Silicone Rubber                    | N            | N         | One-touch emergency key            |
| SL-88-OEM DP-88-OEM     | 11.12" x 6.05" x 0.72" / 11.12" x 6.05" x 0.42" | -40°C to +90°C                   | -40°C to +70°C                   | N                      | SL-88-OEM    | 12            | PS2, USB               | Silicone Rubber                    | N            | N         | NEMA 4X                            |
| KYB-18-OEM              | 4.4" x 5.17" x 0.36"                            | -40°C to +90°C                   | -40°C to +70°C                   | N                      | N            | 0             | PS2, USB               | Silicone Rubber                    | Y            | Y         | NumLock Key for Secondary Keyboard |
| HP-1330                 | 3.10" x 1.40" x 0.45"                           | -40°C to +90°C                   | -40°C to +70°C                   | Force Sensing Resistor | N            | 0             | PS2, USB               | Silicone Rubber                    | N            | Y         | NEMA 4X                            |
| uHP-1535                | 3.5" x 1.5" x 0.5"                              | -40°C to +90°C                   | -40°C to +70°C                   | Force Sensing Resistor | N            | 0             | PS2, AT/Serial         | Silicone Rubber                    | N            | Y         | NEMA 4X                            |
| HP-OEM                  | 3.7" x 3.7" x 0.54"                             | -40°C to +70°C                   | -20°C to +60°C                   | Force Sensing Resistor | N            | 0             | PS2, USB, AT/Serial    | Silicone Rubber                    | N            | N         | OEM Kit                            |
| DT-TB                   | 4.0" x 6.0" x 2.0"                              | -40°C to +85°C                   | 0°C to +55°C                     | Trackball              | N            | 0             | PS2, USB               | Stainless steel                    | N            | N         | Removable ball                     |
| HP-DT                   | 4.9" x 4.9" x 1.13"                             | -40°C to +70°C                   | -20°C to +60°C                   | Force Sensing Resistor | N            | 0             | PS2, USB, AT/Serial    | Silicone Rubber                    | N            | N         | Stainless steel case               |
| HP-PM                   | 6.0" x 6.0" x 1.12"                             | -40°C to +70°C                   | -20°C to +60°C                   | Force Sensing Resistor | N            | 0             | PS2, USB, AT/Serial    | Silicone Rubber                    | N            | Y         | Stainless steel case               |
| PM-TB                   | 6.0" x 6.0" x 1.78"                             | -40°C to +85°C                   | 0°C to +55°C                     | Trackball              | N            | 0             | PS2, USB               | Stainless Steel                    | N            | Y         | Removable ball                     |
| DT-OM-FL                | 2.58" x 5" x 1.56"                              | -40°C to +90°C                   | -40°C to +60°C                   | AquaPoint™             | N            | 0             | USB                    | Silicone Rubber                    | N            | N         | Ergonomic design                   |
| DT-OM                   | 2.58" x 5" x 1.56"                              | -40°C to +90°C                   | -40°C to +60°C                   | AquaPoint™             | N            | 0             | USB                    | Silicone Rubber                    | N            | N         | Optical tracking technology        |
| DT-1000-NI DT-1000-IS   | 16.25" x 7.88" x 1.8"                           | -40°C to +90°C                   | -40°C to +70°C                   | N                      | N            | 24            | NI - PS2, USB IS - PS2 | Silicone Rubber                    | Y            | N         | 114-key functionality              |
| DT-2000-NI DT-2000-IS   | 20.25" x 7.88" x 1.8"                           | -40°C to +80°C<br>-40°C to +70°C | -20°C to +70°C<br>-20°C to +60°C | HulaPoint II™          | N            | 24            | NI - PS2, USB IS - PS2 | Silicone Rubber                    | Y            | Y         | Stainless Steel Case               |
| PM-1000-NI PM-1000-IS   | 17.70" x 9.20" x 1.58"                          | -40°C to +90°C                   | -40°C to +70°C                   | N                      | Y            | 24            | NI - PS2, USB IS - PS2 | Silicone Rubber                    | Y            | N         | 114-key functionality              |
| HP-DT-NI HP-DT-IS       | 4.90" x 4.90" x 1.13"                           | -40°C to +70°C                   | -20°C to +60°C                   | HulaPoint II™          | N            | 0             | NI - PS2, USB IS - PS2 | Silicone Rubber                    | N            | N         | Stainless Steel Case               |
| BT-87-TP-NI BT-87-TP-IS | 12.01" x 7.75" x 2.03"                          | -40°C to +65°C                   | 0°C to +60°C                     | Touchpad, two buttons  | N            | 12            | Bluetooth®, Wireless   | Silicone Rubber                    | N            | Y         | NEMA 4X                            |
| DT-102-ATEX             | 15.32" x 7.42" x 1.8"                           | -40°C to +65°C                   | -20°C to +60°C                   | Touchpad, two buttons  | N            | 12            | PS2                    | Stainless Steel                    | Y            | Y         | Vandal proof                       |



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

Get in touch with us  
on social media!

