

ARK-1120LX

Palm-size and All in One System
Intel® Atom™ N455 Fanless
Embedded Box PC

NEW



Features

- Plug and Play : 3 STEPs to power on the appliance unit for instant use.
- Intel® Atom™ processor N455 1.66 GHz + ICH8M
- 2G SO-DIMM Memory & 320G 2.5" HDD built-in
- Window XP embedded & SUSIAccess Pro (Acronis and McAfee) preload.
- Palm-size design: 133.8 x 43.1 x 94.2 mm, IP40
- Low power consumption, < 10W
- One half mini-PCIe slot. Ex : WiFi add-on card
- Optional VESA/DIN-rail/Wall mount




SUSIAccess
Remote Device Management




Specifications

ARK-1120LX-N5A1E		
Processor System	CPU	Intel Atom processor N455 1.66 GHz
	Max. Speed	1.66 GHz
	System Chipset	Intel ICH8-M
	BIOS	AMI 16 Mbit Flash BIOS
Memory		2GB DDR3 memory built-in
Graphics	Chipset	Intel ICH8-M
	Interface	CRT interface, up to 1600 x 1200 (SXGA)
Ethernet	LAN	1 x 10/100/1000 Mbps Intel 82567V Ethernet controller, Support Wake on LAN
Audio	Interface	Line-out, Line-in
I/O Interface	Serial Ports	2 x RS-232
	USB Interface	4 x USB ports, USB 2.0 Compliant
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Mini PCIe	1 x half-size Mini PCIe
Storage		320G 2.5" SATA HDD built-in
Software Support		Windows XP Embedded Multi Language & SUSIAccess Pro (w/ Acronis and McAfee) built-in
Power Requirement	Power Type	ATX
	Power Input Voltage	12 V _{DC}
	Minimum Power Input	12 V, 1.5 A
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W (Support DC Locker Design)
Power Consumption	Typical	9.12 W
	Max	10.80 W
Mechanical	Construction	Aluminum housing
	Mounting	Support DIN Rail / VESA / Wall mounts (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.70" x 3.71")
	Weight	0.7 kg (1.55 lb)
Environmental and Certifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F) with 0.7m/s air flow and extend temperature HDD
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With CompactFlash disk: 3Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1hr/axis.
	Shock During Operation	With CompactFlash disk: 30Grms, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	UL, CCC, BSMI, CB

Dimensions

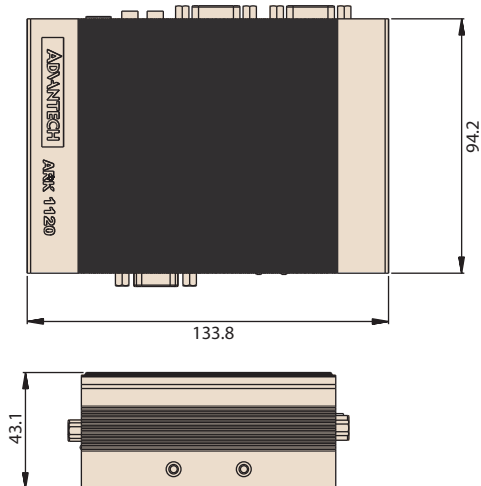


DIN Rail




Unit: mm


VESA mount




Wall mount



Front Panel External I/O Mechanical Layout/Drawing

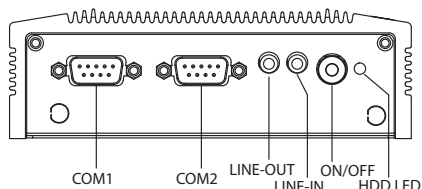

Rear Panel External I/O Mechanical Layout/Drawing

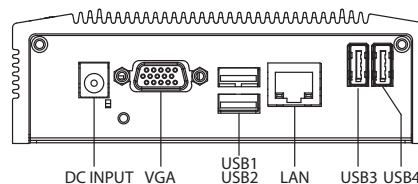

ARK-1120 Product Ordering Information

NEW



ARK-1120LX-N5A1E

- ARK-1120L-N5A1E
- 320G HDD+2G RAM+Windows XP Embedded+SUSIAccess Pro



ARK-1120L-N5A1E

- Intel Atom N455 1.66GHz w/ 2COM+4USB+LAN+Audio



ARK-1120F-N5A1E

- Intel Atom N455 1.66GHz w/ VGA+4COM+2USB+LAN

Packing List

Part Number	Description
-	1 x ARK-1120LX unit w/ 2G memory & 320G HDD & WES 2009 & SUSIAccess Pro
-	1 x Driver/Utility CD/manual
-	1 x Traditional chinese user manual for CCC
-	1 x China RoHS
1960047289T001	DC power adapter locker
1757003553	AC-to-DC Adapter DC12 V/3 A 36 W, with DC-Jack, 0 ~ 40° C for Home and Office Use

Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180 cm, USA type
170203183C	Power Cable 3-pin 180 cm, Europe Type
170203180A	Power Cable 3-pin 180 cm, UK Type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-V003E	ARK-112X series VESA mount kits
AMK-R001E	ARK-112X series DIN Rail mount kits
AMK-W001	ARK-112X series wall mount kits



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

