

# AiMC-3200

Micro Computer, Intel® Core™ i7/i5/i3 CPU,  
2 Expansion, 250W 80Plus PSU





## Features

- Intel® H61 Platform
  - Intel® 3<sup>rd</sup>/2<sup>nd</sup> gen Core™ i7/i5/i3 CPU (LGA1155)
  - One PCIe x16 & one PCIe x4 Expansion Slots\*
- Compact, well-thought-out design
  - Two internal, shock-resistant, 2.5" SATA HDD bays
  - Front accessible I/O: VGA+DVI-D, 2 GbE LAN, 3 USB2.0, 2 COM
  - Easy-to-maintain system fan and reusable filter
  - Alert to chassis intrusion
- Energy Savings
  - 250W 80Plus PSU


\* Subject to Cooler solution, it will occupy PCIe x16 slot

## Specifications


Processor System	CPU	Core i7-2600	Core i5-3550S	Core i3-3220
	Core	4	4	2
	Base Frequency	3.4 GHz	3.0 GHz	3.3 GHz
	L3 Cache	8 MB	6 MB	3 MB
	Chipset	H61		
BIOS	AMI 64Mb SPI Flash			
Memory	Technology	Dual Channel DDR3 1066/1333 MHz (Non ECC)		
	Max. Capacity	16 GB (8 GB per DIMM)		
	Socket	204-pin SO-DIMM x 2		
Graphics	Chipset Integrated	Integrated Intel HD Graphics		
Expansion slot	PCI Express x16	1 (Lower-layer slot)		
	PCI Express x4	1 (Upper-layer slot)		
Ethernet	Interface	10/100/1000 Mbps		
	Controller	LAN1: Intel 82579V, LAN2: Intel 82583V		
SATA	Max Data Transfer Rate	300 MB/s (SATA 2.0)		
	HDD Bay	2 internal 2.5"		
I/O Interface	Display	VGA+DVI-D		
	USB	4 USB2.0 (3 in front, 1 internal type-A for software key)		
	Serial	2 RS-232		
	PS/2	1		
Watchdog Timer	Output	System reset		
	Interval	Programmable 1 ~ 255 sec/min		
Power Supply	Output Rating	AC 250W, ATX		
	Input Voltage	100 V <sub>AC</sub> ~ 240 V <sub>AC</sub>		
Cooling	System Fan	2 (6cm / 27.7 CFM)		
	Air Filter	Yes		
Miscellaneous	Chassis intrusion alert	Yes		
	LED Indicators	Power, HDD, temperature		
	Control	Power on/off switch		
Environment	Temperature	Operating 0 ~ 40° C (32 ~ 104° F)	Non-operating -20 ~ 60° C (-4 ~ 140° F)	
	Humidity	10 ~ 85% @ 40° C, non-condensing		10 ~ 95% @ 40° C, non-condensing
	Vibration	1Grms, random, 5~500Hz, 3 axes, 1 hr/axis		2Grms, sine wave, 5~500Hz, 3 axes, 1 hr/axis
	Shock	10G, half sine wave, 11 ms duration		
	EMC	CE/FCC, CCC, BSMI		
	Safety	UL/CB, CCC, BSMI		
Physical Characteristics	Dimension (W x H x D)	232 x 90 x 232 mm		
	Weight	4.5 kg		

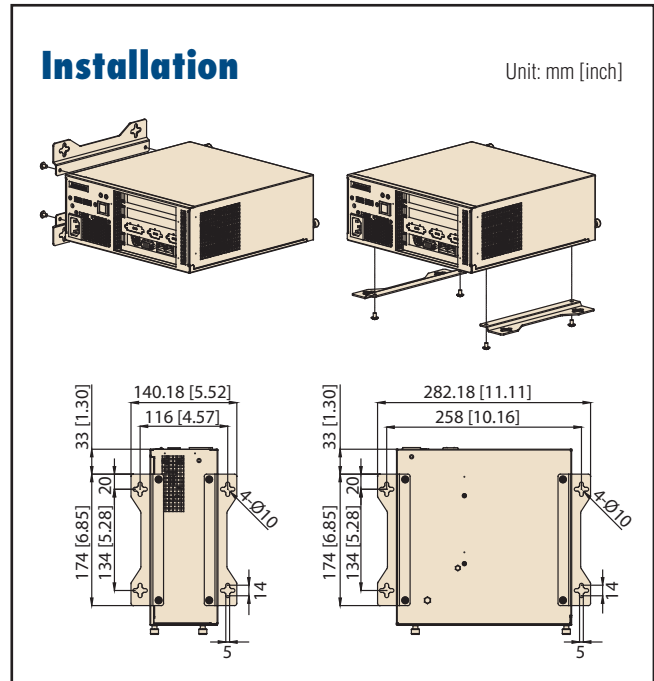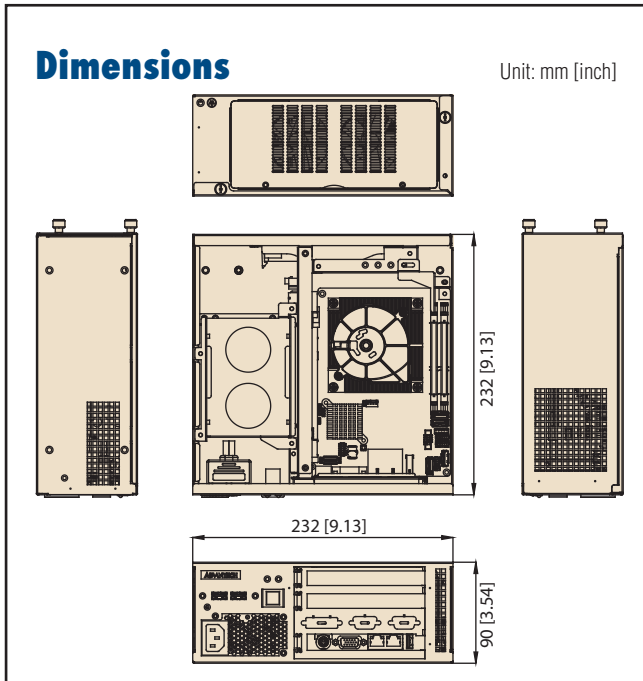



### Front View

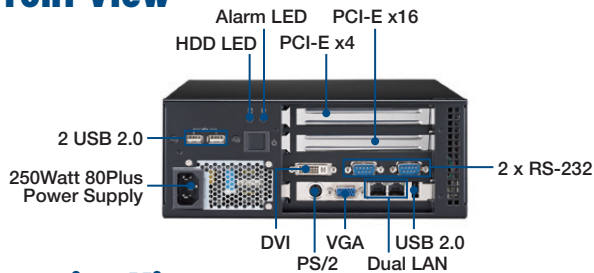

### Rear Cover for Replacing Fans

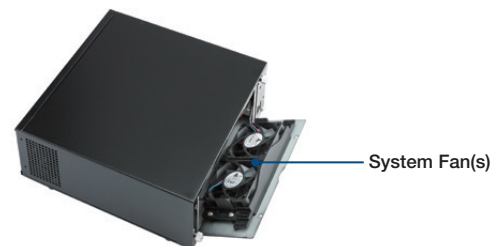

### Interior View

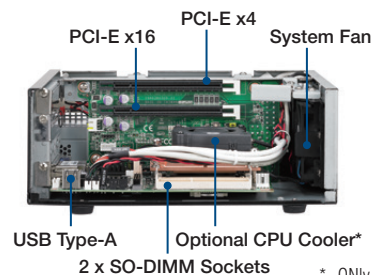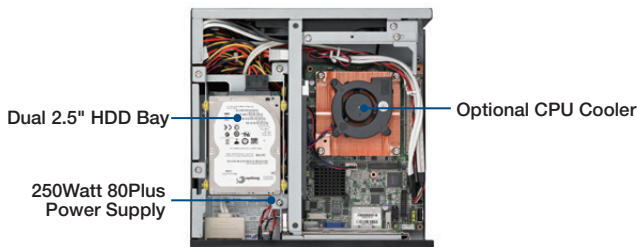

\* Only 1 PCIe slot is available when using 1.5U CPU Cooler

### Ordering Information

Part Number	Description
AIMC-3200-00A1E	Micro Computer, Intel Core i7/i5/i3 CPU, 2 Expansion, 250W 80Plus PSU

### Optional Accessories

Part Number	Description
1960053207N001	1.5U Cooler for i7/i5/i3 CPU
1960053065N001	1U Cooler for i3 CPU
PCIE-1674PC-AE	4-port PCI express GbE PoE card
PCIE-1672PC-AE	2-port PCI express GbE PoE card
PCA-COM485-00A1E	4-port RS-485/422 Module by LPC
PCA-COM232-00A1E	4-port RS-232 Module by LPC
PCA-AUDIO-HDA1E	Audio extension module with HD audio interface
PCA-TPM-00A1E	Trusted platform module compliant with TCG 1.2

Note: Purchasing proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers are NOT compatible.

### Packing List

Items	Part Number	Quantity
AIMC-3200 Bare System	AIMC-3200-00A1E	1
Driver CD	2066302600	1
SATA HDD Data Cable	1700003194	2
SATA HDD Power Cable	1703150102	2
Four-port USB Cable	1700014398	1
LPT Cable	1700002223	1
Mounting Brackets	1960014487T00C	2
Rubber Foot	1990012452S000	4



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

Get in touch with us  
on social media!

