

AiMC-3420

Micro Computer, Intel® Core™ i7/i5/i3 CPU,
3 Expansion, 300W 80Plus PSU



Features


- Intel® H61 Platform
 - Intel® 3rd/2nd gen Core™ i7/i5/i3 CPU (LGA1155)
 - One PCIe x16 & two PCIe x1 Expansion Slots
- Compact & Rich I/O Configuration
 - One internal 3.5" SATA HDD bays with shock-resistant
 - Optional front removable 2.5" HDD bay
 - VGA, 2 GbE LAN, 8 USB2.0, 2 COM
 - Easy-to-maintain system fan and reusable filter
- Energy Savings
 - 300W 80Plus PSU

Specifications


Processor System	CPU	Core i7-2600	Core i5-3550S	Core i3-3220
	Core	4	4	2
	Base Frequency	3.4 GHz	3.0 GHz	3.3 GHz
	L3 Cache	8 MB	6 MB	3 MB
	Chipset	H61		
BIOS	AMI 64Mb SPI Flash			
Memory	Technology	Dual Channel DDR3 1066/1333 MHz (Non ECC)		
	Max. Capacity	16 GB (8 GB per DIMM)		
	Socket	204-pin SO-DIMM x 2		
Graphics	Chipset Integrated	Integrated Intel HD Graphics		
Expansion slot	PCI Express x16	1		
	PCI Express x1	2		
Ethernet	Interface	10/100/1000 Mbps		
	Controller	LAN1: Intel 82579V, LAN2: Intel 82583V		
SATA	Max Data Transfer Rate	300 MB/s (SATA 2.0)		
	HDD Bay	1 internal 3.5"		
I/O Interface	Display	VGA		
	USB	8 (USB 2.0 compliant, 2 in front, 5 in rear, 1 internal type-A for software key)		
	Serial	2 RS-232		
	PS/2	1		
Watchdog Timer	Output	System reset		
	Interval	Programmable 1 ~ 255 sec/min		
Power Supply	Output Rating	AC 300W, ATX		
	Input Voltage	100 V _{AC} ~ 240 V _{AC}		
Cooling	System Fan	1 (9cm / 53 CFM)		
	Air Filter	Yes		
Miscellaneous	LED Indicators	Power, HDD, Temp, Fan		
	Control	Power on/off switch, Reset button		
Environment	Temperature	Operating 0 ~ 40° C (32 ~ 104° F)	Non-operating -20 ~ 60° C (-4 ~ 140° F)	
	Humidity	10 ~ 85% @ 40° C, non-condensing		10 ~ 95% @ 40° C, non-condensing
	Vibration	1Grms, random, 5~500Hz, 3 axes, 1 hr/axis		2Grms, sine wave, 5~500Hz, 3 axes, 1 hr/axis
	Shock	10G, half sine wave, 11 ms duration		
	EMC	CE/FCC, CCC, BSMI		
	Safety	UL/CB, CCC, BSMI		
	Physical Characteristics	Dimension (WxHxD)	150 x 222 x 270 mm	
Weight		5 kg		

Dimensions


Unit: mm [inch]

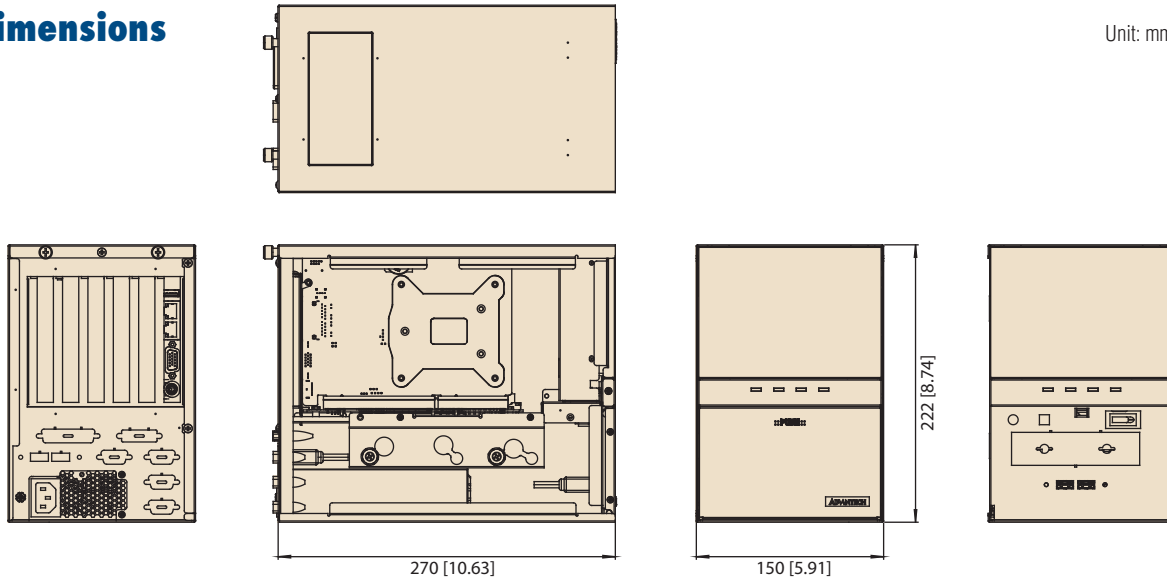


Front View

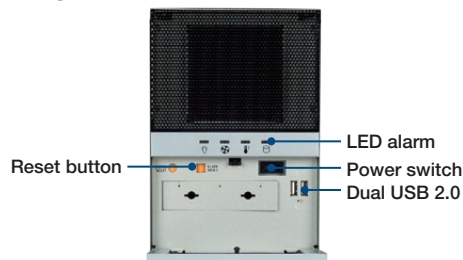

Rear View

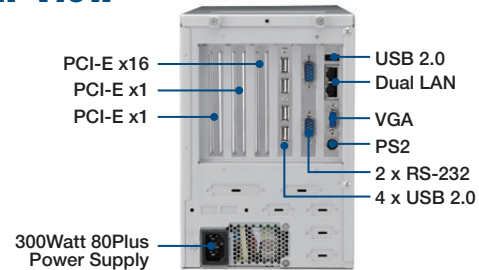

Interior View

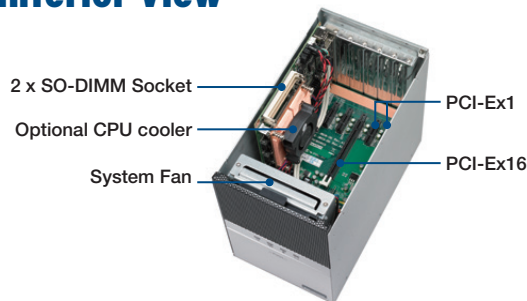

IDT-3120E



Ordering Information

Model name	Power Supply
AIMC-3420-00A1E	Micro Computer, Intel Core i7/i5/i3 CPU, 3 Expansion, 300W 80Plus PSU

Packing List

Items	Part Number	Quantity
AIMC-3420 Bare System	AIMC-3420-00A1E	1
Driver CD	2066302600	1
SATA HDD Data Cable	1700003194	1
SATA HDD Power Cable	1703150102	1
LPT Cable	1700002223	1
MOUNTING BRACKET	1960048518N001	1
Rubber Foot	1990012452S000	4

Optional Accessories

Part Number	Description
1960053207N001	1.5U Cooler for i7/i5/i3 CPU
1960053065N001	1U Cooler for i3 CPU
PCIE-1674PC-AE	4-port PCI express GbE PoE card
PCIE-1672PC-AE	2-port PCI express GbE PoE card
1700008822	DVI Cable
IDT-3120E	Removable dual 2.5" HDD tray
PCA-COM485-00A1E	4-port RS-485/422 Module by LPC
PCA-COM232-00A1E	4-port RS-232 Module by LPC
PCA-AUDIO-HDA1E	Audio extension module with HD audio interface
PCA-TPM-00A1E	Trusted platform module compliant with TCG 1.2

Note: Purchasing proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers are NOT compatible.



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

