HPC-7480

4U Rackmount/Tower Chassis for EATX Server Board with 8 Hot-swap Drive Bays, Single PSU and 7 Expansion Slots




Features

- 4U rackmount chassis supports ATX/CEB/EATX motherboard
- Eight hot swap SAS/SATA drive bays
- Hot swap fan module design facilitates maintenance
- 665 W high efficiency single power supply
- Lockable front bezel prevents unauthorized access



Specifications

Form Factor Support		4U chassis support for max. motherboard size - 12" >	(13" EATX
Expansion Slots		7 x Full-height, Full-length slots	
Drive Bay	Slim ODD Bay 5.25" (front-accessible) 3.5" (front-accessible) 3.5" (internal) 2.5" (front-accessible) 2.5" (internal)	3 (ODD should be purchased separately) 8	
Cooling	Chassis Fan Air Filter	4 (8 cm / 68.15 CFM) Yes	
System Monitoring		-	
Front I/O Interface	USB PS/2	2	
Miscellaneous	LED Indicators Rear Panel	Power, HDD activity, LAN	
Environment	Temperature Humidity Vibration (5~500 Hz) Shock	Operating 0 ~ 40° C (32 ~ 104° F) 10 ~ 85% @ 40° C non-condensing 1 Grms 10 G (with 11 ms duration, half sine wave)	Non-Operating -40 ~ 70° C (-40 ~ 158° F) 10 ~ 95% @ 40° C, non-condensing 2 Grms 30 G
Physical Characteristics	Dimensions (W x H x D) Weight	452 x 178 x 648 mm (4U) 29.94 kg	

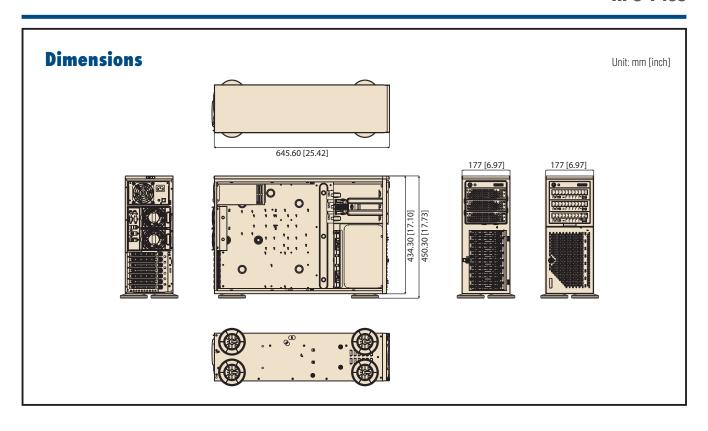

Ordering Information

665W high efficiency

power supply

Part Number	Power Supply
HPC-7480-66A1E	665 W Single Power Supply

Packing List

Description	Quantity
Hot-swap 3.5" HDD Trays (Pre-installed)	x 8
Key for front bezel door	x 2
Startup Manual	x 1
Chassis Feet	x 4


Seven expansion slots

Optional Accessories

Part Number	Description
XSMC-CSE-PT26L-B	HPC-7480 Chassis Rail Kit including mounting ears, handles and slide rail
96CB-SAS-SATA-4P1	Mini-SAS cable kit for add-on SAS RAID card*

*Note: When using add-on RAID card with mini-SAS connector(s), purchasing 96CB-SAS-SATA-4P1 cable is a MUST. Single port RAID card needs 1 piece and dual port needs 2 pieces.

Inside View

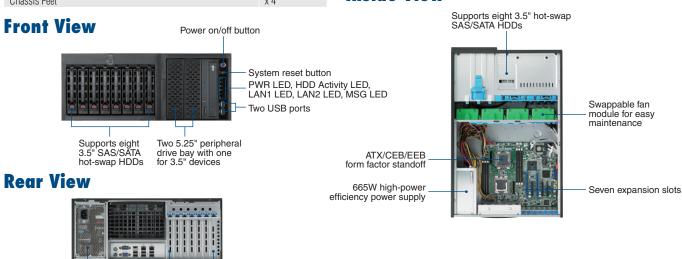



www.L-TronDirect.com 800-830-9523 info@L-Tron.com

