

# IPPC-6152A IPPC-6172A IPPC-6192A

## 15" XGA/17" SXGA/19" SXGA TFT LCD LED Backlight Core™ i7/i5/i3 Industrial Panel PC

**NEW**



Windows 8



### Features

- 15" XGA/17" SXGA/19" SXGA TFT LCD with touchscreen
- Supports Intel® Core™ i7/i5/i3 processor with Q87 chipset (up to 3.1GHz)
- System supports four DIMM sockets support up to 32 GB DDR3 1333/1600 MHz SDRAM
- Offers multiple expansion slots including two PCI (standard), one PCI + one PCIe x4 (optional), two PCIe x1 (optional)
- SATA 2.0 or SATA 3.0 HDDs and RAID 0,1 compatibility
- Front USB access and system reset function
- Front panel is IP65 compliant
- Supports Intel AMT 9.0 and Intel vPro competent
- Supports Microsoft® Windows® 8 and Windows 7
- Supports SUSIAccess and Embedded Software APIs
- Optional Functionality –CFast ,PCI/ PCIe expansion,DVD-ROM

### Introduction

The IPPC-6000A Series is an Industrial Panel PC with front USB access, supports the powerful 4th Gen Intel Core™ i7/i5/i3, high speed DDR3 memory, up to 32 GB, two expansion slots. The processor and chipset combination form the foundation of vPro, Intel's next generation digital office platform, offering remote out-of-band manageability, improved security, and energy efficient performance. Two SATA hard driver interface with RAID 0,1 support provides data security. Multi function optional –CFast ,PCI/ PCIe expansion,DVD-ROM which offers great flexibility for application specific requirements. Rugged Metal & IP65 Flat-Sealed Front provide excellent durability in harsh environment. With optional mounting accessories, from panels to racks,it can be mounted anywhere.

### Specifications

#### General

- BIOS** AMI 64 MB Flash BIOS
- Certification** UL, CE, FCC, CCC, BSMI
- Enclosure** Die-cast flat-sealed front with SGCC Housing
- Dimensions (W x H x D)**
  - IPPC-6152A : 449.92 x 315.63 x 126.4 mm (17.71" x 12.43" x 4.98")
  - IPPC-6172A: 481.93 x 355.87 x 132.5 mm (18.97" x 14.01" x 5.22")
  - IPPC-6192A: 481.93 x 384.6 x 135.5 mm (18.97" x 15.14" x 5.33")
- Mounting** Panel, Rack (option)
- OS Support** Microsoft Windows 7, Windows 8
- Power Input** 100 ~ 240 V<sub>AC</sub> @ 60 ~ 50 Hz, 7 ~ 3.5 A
- Power Supply** 350 W

#### System Hardware

- CPU** Supports Intel® Core™ i7/i5/i3 processor (up to 3.1GHz)
- Chipset** Intel Q87
- Memory** System supports four DIMM sockets support up to 32 GB DDR3 1333/1600 MHz SDRAM
- LAN** 10/100/1000 Base-T Ethernet x 2
- Expansion** Two half-length PCI (Standard)  
Two PCIe x1(Optional)  
One PCI + One PCIe x4 (Optional)
- Storage** Supports 2 x 2.5" SATA 2.0 or SATA 3.0 HDDs and RAID 0,1 compatibility
- Optical Driver** 1 x Slim Type DVD-RW (optional)  
CFast (optional)
- I/Os** 4 (3 x RS-232, 1 x RS-232/422/485 to support auto flow control)  
1 x GPIO  
2 x Reservation ports  
5 x USB Host( USB 2.0 front, 4 USB 3.0) 2 x GbE LAN  
VGA x1; DVI x1; DP x1  
2 (1 x keyboard and 1 x mouse)  
2 (Mic-in, Line-out)

#### LCD Display

- Backlight Life** 50,000 hrs
- Contrast Ratio**
  - IPPC-6152A: 700:1
  - IPPC-6172A:1000:1
  - IPPC-6192A:1000:1
- Display Size** 15", 17", 19"
- Display Type**
  - IPPC-6152A: XGA TFT LCD LED Backlight
  - IPPC-6172A: SXGA TFT LCD LED Backlight
  - IPPC-6192A: SXGA TFT LCD LED Backlight
- Luminance**
  - IPPC-6152A: 400 cd/m2
  - IPPC-6172A: 350 cd/m2
  - IPPC-6192A : 350 cd/m2
- Max. Colors**
  - IPPC-6152A:16.2M/262K
  - IPPC-6172A: 16.7M (RGB 6-bit + Hi-FRC data)
  - IPPC-6192A:16.7M (RGB 6-bit + Hi-FRC data)
- Max. Resolution**
  - IPPC-6152A: 1024 x 768
  - IPPC-6172A: 1280 x 1024
  - IPPC-6192A: 1280 x 1024
- Viewing Angle (H/V°)**
  - IPPC-6152A:160/140
  - IPPC-6172A: 170/160
  - IPPC-6192A: 170/160

#### Touchscreen


- Lifespan** 36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- Light Transmission** > 80%
- Type** Analog resistive 5-wire

#### Environment

- Humidity** 5 ~ 85% @ 40°C (non-condensing)
- Ingress Protection** Front panel: IP65
- Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- Vibration Protection** 5 ~ 500 Hz, 1 Grms random vibration

## Dimensions

Unit: mm [inches]

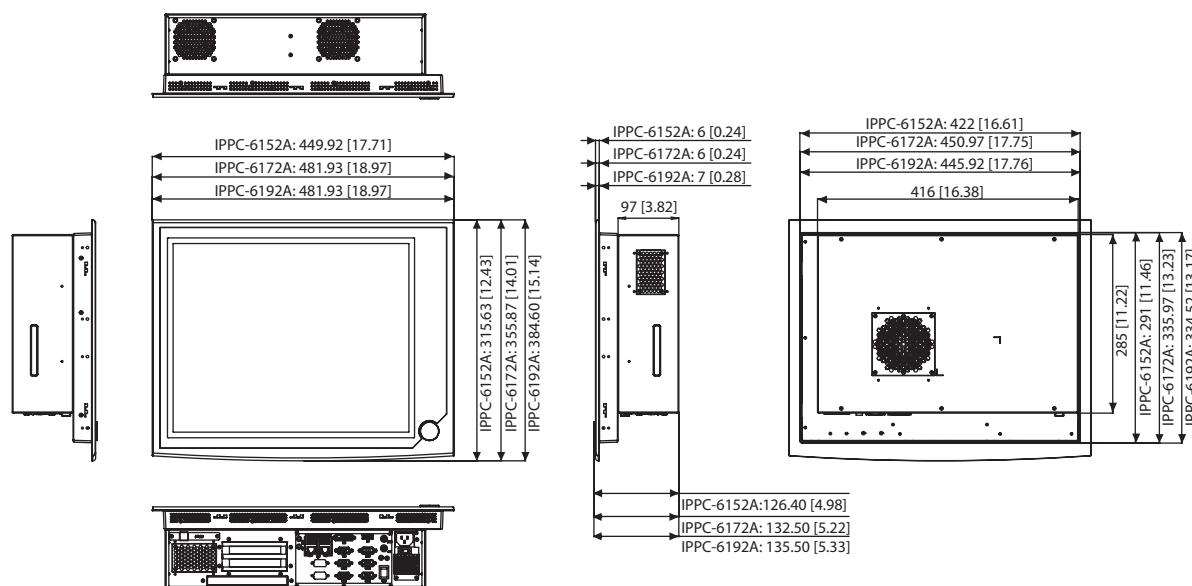

### Panel Cut-out Dimensions:

**IPPC-6152A: 424x293mm(16.69"x11.54")**

**IPPC-6172A: 454x338mm(17.87"x13.31")**

**IPPC-6192A: 454x338mm(17.87"x13.31")**


## Ordering Information

- **IPPC-6152A-R2AE** 15" XGA LED IPPC-61X2-R2 2PCIs w/ TS
- **IPPC-6172A-R2AE** 17" SXGA LED IPPC-61X2-R2 2PCIs w/ TS
- **IPPC-6192A-R2AE** 19" SXGA LED IPPC-61X2-R2 2PCIs w/ TS


## Accessories

- **IPPC-6152A-RMKE** IPPC-6152A Rack mount Kit
- **IPPC-6172A-RMKE** IPPC-6172A Rack mount Kit
- **IPPC-6192A-RMKE** IPPC-6192A Rack mount Kit
- **IPPC-6152-CFASTE** CFast module for IPPC-61X2-R2 Series
- **IPPC-6152-PCIE** PCIe4 & PCI module, IPPC-61X2-R2 Series
- **IPPC-6152-PCIEE** PCIe module for IPPC-61X2-R2 Series
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702031836** Power Cable China/Australia Plug 1.8 M
- **96CB-POWER-B-1.8M1** POWER CORD for China 1.8M

## I/O View

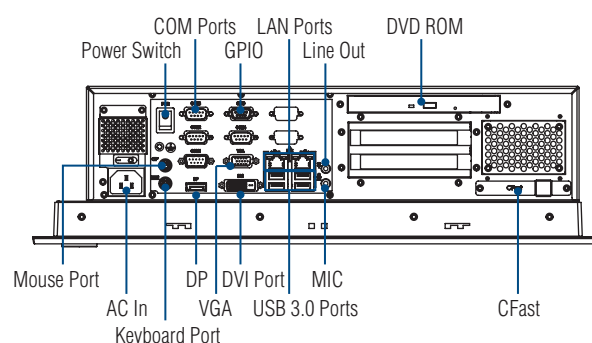

## Front Accessible USB Port

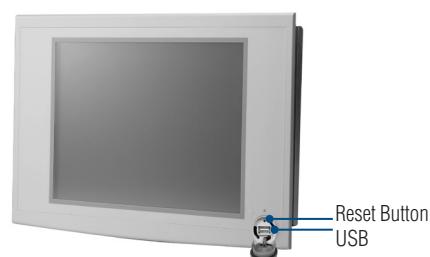

## CPU List

| CPU Type List & Description |                       |                                     |
|-----------------------------|-----------------------|-------------------------------------|
| Model Number                | Advantech Part Number | Description                         |
| I7-4770S                    | 96MPI7-3.1-8M10T      | CORE 3.1G 8M 1150P 4 CORE I7-4770S  |
| I7-4770TE                   | 96MPI7-2.3-8M10T      | CORE 2.3G 8M 1150P 4 CORE I7-4770TE |
| I5-4670S                    | --                    | CORE 3.8G 6M 4 CORE I5-4670S        |
| I5-4590S                    | 96MPI5-3.0-6M10T      | CORE 3.0G 6M 1150P 4CORE I5-4590S   |
| I5-4570S                    | 96MPI5-2.9-6M10T      | CORE 2.9G 6M 1150P 4 CORE I5-4570S  |
| I5-4570TE                   | 96MPI5-2.7-4M10T      | CORE 2.7G 4M 1150P 2 CORE I5-4570TE |
| I5-4590T                    | 96MPI5-2.0-6M10T      | CORE 2.0G 6M 1150P 4CORE I5-4590T   |
| I3-4360                     | 96MPI3-3.7-4M10T      | CORE 3.7G 4M 1150P 2CORE I3-4360    |
| I3-4330                     | 96MPI3-3.5-4M10T      | CORE 3.5G 4M 1150P 2CORE I3-4330    |
| I3-4350T                    | 96MPI3-3.1-4M10T      | CORE 3.1G 4M 1150P 2CORE I3-4350T   |
| I3-4340TE                   | 96MPI3-2.6-4M10T      | CORE 2.6G 4M 1150P 2CORE I3-4340TE  |
| I3-4330TE                   | 96MPI3-2.4-4M10T      | CORE 2.4G 4M 1150P 2CORE I3-4330TE  |
| G3320TE                     | 96MPP-2.3-3M10T       | PENTIUM 2.3F 3M 1150P TRAY G3320TE  |
| G3420T                      | --                    | Intel® Pentium ® Processor G3420T   |

## Memory List

| Memory Type List & Description |                       |                                      |
|--------------------------------|-----------------------|--------------------------------------|
| Model Number                   | Advantech Part Number | Description                          |
| Transcend TS2KNU28100-3S       | 96D3-1G1333NN-TR1     | 1G DDR3-1333 240PIN 128X8 SAM(G)     |
| Apacer 78.01GC3.420            | 96D3-1G1066NN-AP      | 1G DDR3-1066 240PIN 128X8 ELP(G)     |
| Apacer 78.A1GC6.421            | 96D3-2G1333NN-AP      | 2G DDR3-1333 240PIN 128X8 ELP(G)     |
| Kingston KVR1333D3N9/2G        | 96D3-2G1333NN-KI      | 2G DDR3-1333 240PIN 128X8 KIN(G)     |
| Transcend TS5KNN28100-3Y       | 96D3-2G1333NN-TR1     | 2G DDR3-1333 240PIN 256X8 HYX(G)     |
| Transcend TS5KNU28300-3S       | 96D3-2G1333NN-TR2     | 2G DDR3-1333 240PIN 128X8 SAM(G)     |
| Transcend TS5KNN30100-6S       | 96D3-2G1600NN-TRL     | 2G DDR3-1600 240PIN 256X8 VLP SAM(G) |
| Apacer 78.B1GDE.AF1            | 96D3-4G1333NN-AP      | 4G DDR3-1333 240PIN 256X8 HYX(G)     |
| Transcend TS7KNN28300-3Y       | 96D3-4G1333NN-TR      | 4G DDR3-1333 240PIN 256X8 HYX(G)     |
| Apacer 78.B1GE3.AFF0C          | 96D3-4G1600NN-APL     | 4G DDR3-1600 240PIN 256X8 VLP HYX(G) |
| Transcend TS9KNH28300-6M       | 96D3-8G1600NN-TR      | 8G DDR3-1600 240PIN 512X8 MIC(G)     |
| Apacer 78.C1GET.ATF0C          | 96D3-8G1600NN-APL     | 8G DDR3-1600 240PIN 512X8 VLP MIC(G) |



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

Get in touch with us  
on social media!

