


# ASMB-585

## LGA 1151 Intel® Xeon® E3 v5/ 6th Generation Core i series Micro ATX Server Board with 4 DDR4, 1 PCIe x16, 3 PCIe x4, Quad LANs, USB 3.0

**NEW**

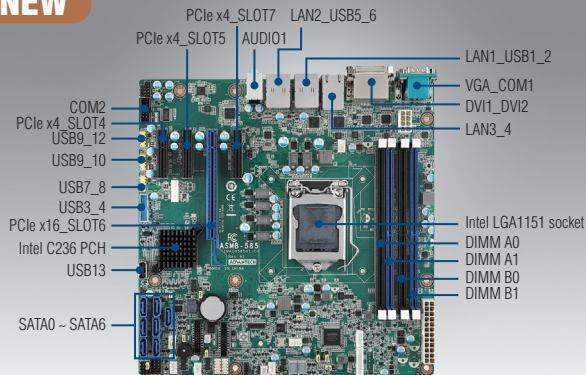

### Features

- Supports LGA 1151 Intel® Xeon® E3-1200 v5 and 6th Generation Core™ i7/i5/i3 processors
- DDR4 ECC/Non-ECC 2133/1866/1600 MHz DIMM up to 64GB
- One PCIe x16 slot (Gen3 x16 link), three PCIe x4 slots (2 Gen3 x4 link, 1 Gen3 x1 link)
- 0 ~ 60° C ambient operation temperature range
- Support up to ten RS-232 or six RS-232 and four RS-422/485 ports
- Support up to four Gigabit LAN ports
- Triple display - two DVI-D and one VGA ports
- Support seven SATA3 ports and six USB 3.0 ports


Quiet

### Specifications

CE FCC

Form Factor		Micro ATX form factor				
Processor System	Socket	Intel LGA 1151				
	CPU type	Intel® Xeon® E3-1200 v5 and 6th Gen Core™ i3/i5/i7 series processors (TDP up to 91W)				
Core Logic	Chipset	Intel C236 chipset				
	Total slots	4				
Memory	Capacity	Maximum 64 GB				
	Memory type	DDR4 ECC/Non-ECC 2133/1866/1600 MHz DIMM				
	Memory size	4 GB, 8 GB, 16 GB				
Expansion Slots	Total PCI/PCI-X/PCIe slots	4				
	Slot location 1	-				
	Slot location 2	-				
	Slot location 3	-				
	Slot location 4	PCIe x4 slot (Gen3 x4 link)				
	Slot location 5	PCIe x4 slot (Gen3 x1 link)				
	Slot location 6	PCIe x16 slot (Gen3 x16 link)				
Graphics	VGA	Intel HD Graphics				
	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed				
Storage	SATA controller	Intel C236: 7 SATA3 6Gb/s Intel Matrix Storage (for Windows only) (Supports software RAID 0, 1, 10 & 5)				
	SAS controller	-				
Networking	GbE LAN	1 x Intel I219LM + 3 x Intel I210AT				
Onboard I/O Connectors	LPT connector	-				
	PSU connector	24-pin SSI power connector + 8-pin SSI 12 V power connector				
	USB 2.0 connector	3 (supports 6 x USB2.0 port), 1 x Type-A				
	USB 3.0 connector	1 (support 2 x USB 3.0 port)				
	Fan header	5 x 4pin				
	SMBus	1				
	Chassis intruder	1				
	Front LAN LED	2				
	Audio Header	1 (ALC 892)				
	Serial port header	3 (supports 5 x serial ports)				
	Rear I/O Connectors	External serial port	1			
		External USB port	4 x USB 3.0			
VGA port		1				
DVI port		2				
RJ-45		4				
PS/2 KB/mouse		-				
Watchdog Timer	Output	System reset				
	Interval	Programmable 1 ~ 255 sec/min				
Power Requirement	Power On	3.3 V	5 V	12 V	5 Vsb	-12 V
		17.57 A	20.5 A	40.01 A	2 A	0.5 A
Environment	Temperature	Operating	Non-operating			
		0 ~ 60° C, depends on CPU speed and cooler solution	-40 ~ 85° C			
Physical Characteristics	Humidity	0% ~ 90%		5% ~ 95% (Non condensing)		
		Dimensions	244 x 244 mm (9.6" x 9.6")			

## Block Diagram

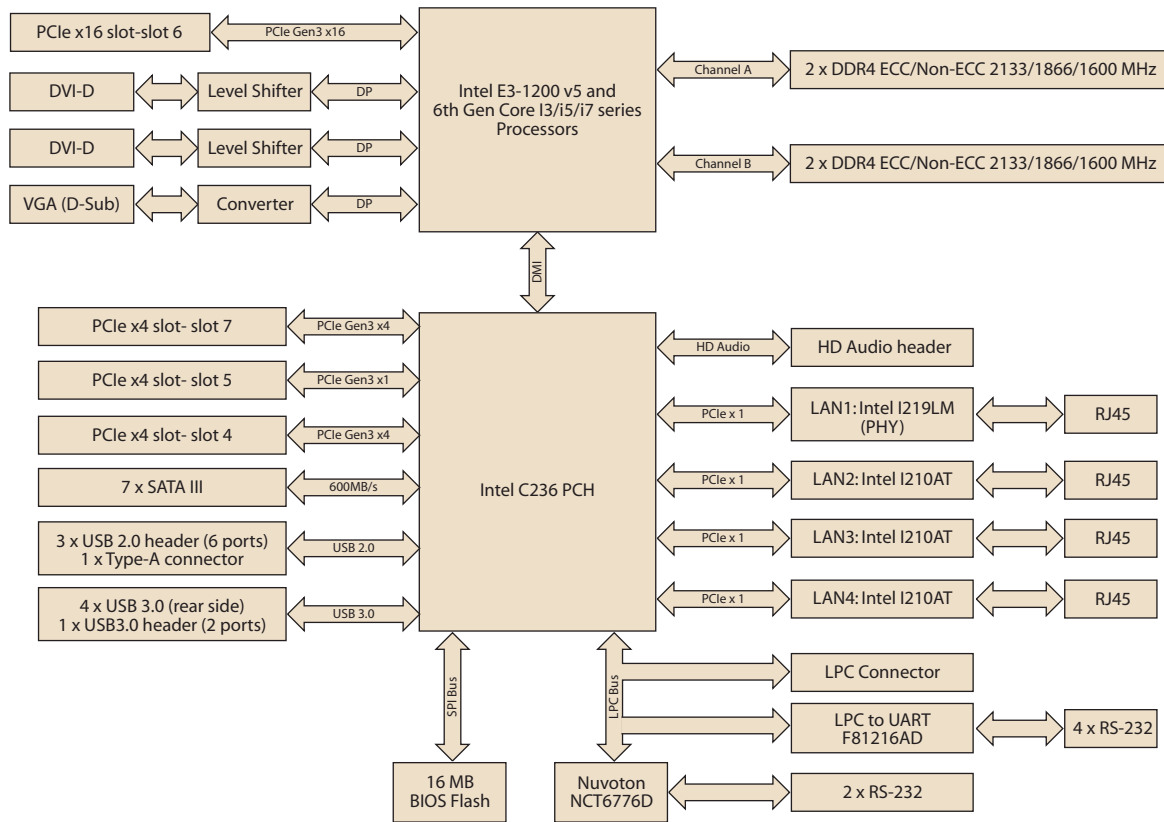

## Ordering Information

Part Number	Chipset	Memory	LAN	IPMI	Graphic
ASMB-585G2-00A1E	C236	DDR4 ECC/Non-ECC	2	-	Intel HD Graphics
ASMB-585G4-00A1E	C236	DDR4 ECC/Non-ECC	4	-	Intel HD Graphics

## Packing List

Part Number	Description	Quantity
2061058500	Driver CD	x 1
2001058510	Startup manual	x 1
1700003194	SATA data cables	x 2
1703150102	SATA power cables	x 2
19Z0000996T000	I/O shield	x 1

## Optional Accessories

Part Number	Description
1960049408N001	LGA 1151 CPU heatsink for 1U chassis
1960052651N021	LGA 1151 CPU cooler for 2U/4U chassis
PCA-TPM-00A1E	TPM Module by LPC
19Z0001156T000	1U IO bracket for ASMB-585
1700002204	Dual port USB2.0 cable (27 cm) with bracket
1700008461	Four port USB2.0 cable (30.5 cm) with bracket
1700020277-01	Dual port USB3.0 cable (30 cm) with bracket
PCA-COM232-00A1E	4 ports RS-232 module connect to LPC connector
PCA-COM485-00A1E	4 ports RS-422/485 module connect to LPC connector
1701090401	Single port RS-232 cable(40cm) for COM2 connector
1700008762	Dual port RS-232 cable(22.5cm) for COM3_4 & COM5_6 connector
968EMLSAP3	SUSIAccess Pro V2.1 Package for ISG w/CD/flyer/C

## I/O View



ASMB-585G2-00A1E



ASMB-585G4-00A1E

Note 1: Purchasing ASMB-585's proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers may NOT be compatible with ASMB-585.



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

