

FPM-3121G

12.1" SVGA Industrial Monitor with Resistive Touchscreen, Direct-VGA, DVI and Wide Operating Temperature



Features

- 12.1" SVGA TFT LED LCD with 50,000 backlight life time
- Robust anodized coated aluminum front bezel and stainless steel rear cover
- Supports wide operating temperatures
- Increase reliability by enhanced 5-wire resistive touch sensor
- Anti-glare screen with tempered glass and IP65 certified front panel
- Full enclosure ground isolation protection
- Supports VGA/DVI input, dual touch interfaces and two power inputs
- Front lockable OSD membrane keys with user-defined brightness setting
- Energy Star certification
- Front panel is IP65 compliant
- Supports panel, VESA, wall and desktop stand mounting

Introduction

The FPM-3121G is a particularly rugged and reliable 12.1" SVGA wide temperature industrial monitor for a variety of industry applications. Equipped with a hard anodized coating, stainless steel chassis, and -20 to 60°C operating temperature, it can satisfy demands in a wide range of harsh industrial applications. This model also features enhanced 5-wire resistive touch and system ground isolation protection to enhance the reliability. Lockable OSD keys on front panel with 2 user-defined contrast/brightness settings.

Specifications

General

- **Button Controls** OSD control pad on front side with lockable function
Two user-defined contrast/brightness settings
- **Certification** CE, FCC Class A, BSMI, CCC, UL, Energy Star
- **Dimensions (W x H x D)** 312 x 224 x 60 mm (12.28" x 8.82" x 2.36")
- **Enclosure** Front panel: Aluminum with hard anodized coating
Rear cover: Stainless steel chassis
Ground Isolation Protection
- **Mounting** Panel, VESA arm, or wall & desktop mount with optional mounting kit
- **Power Input** Phoenix Jack: 24 V_{DC} input
DC Jack: external 57 W power adapter, with 100 ~ 240 V_{AC} input and +12 V_{DC} @ 4.75 A output
- **Power Consumption** 9 W
- **Video Port** VGA & DVI-D Port
- **Weight (Net)** 4.07 kg (8.975 lbs)

LCD Display

- **Display Type** SVGA TFT LCD
- **Backlight Type** LED
- **Display Size** 12.1"
- **Max. Resolution** 800 x 600
- **Max. Color** 16.2M (RGB 8-bit)
- **Viewing Angle (H/V°)** 160 / 140
- **Luminance (cd/m²)** 450
- **Operation Life (hrs)** 50,000
- **Contrast Ratio** 700:1

Touchscreen (Optional)


- **Driver** Penmount 6000
- **Type** 5-wire Resistive with enhanced ITO film
- **Interface** USB & RS-232 (Combo)
- **Lifespan** 36 million with a silicone rubber of R8 finger, writing rate is by 250g at 2 times/s
- **Light Transmission** > 80%
- **OS Support** Windows XP, Vista, 7, 8, XPe, CE and Linux
- **Power Consumption** +5 V @ 100 mA
- **Touch Resolution** Linearity

Environment

- **Operation Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front panel is IP65 compliant
- **Shock** 11ms, 10G (Non Operating, Half Sine Wave)
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

Dimensions

Unit: mm [inch]

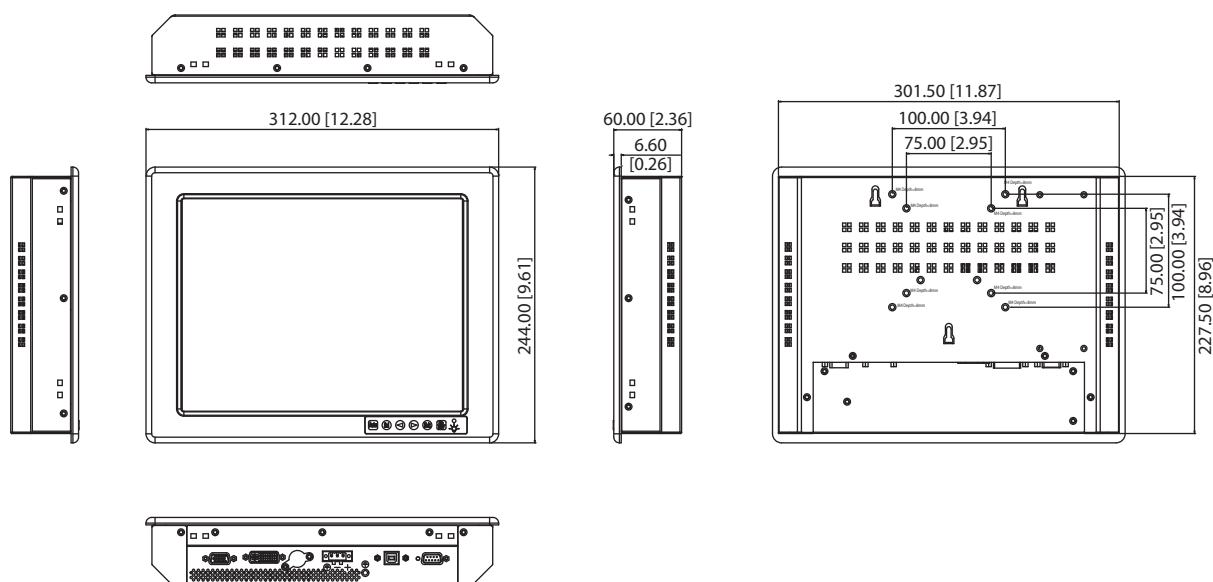

Panel Cut-out Dimensions: 303.5 x 229.5 mm (11.95" x 9.04")


Ordering Information

- **FPM-3121G-X0AE** 12.1" SVGA Ind. Monitor with Wide Temp
- **FPM-3121G-R3AE** 12.1" SVGA Ind. Monitor w/ Wide Temp, Resistive TS


Accessories

- **FPM-2150G-SMKE** Mounting kit for desktop stand & wall
- **1702002600** Power Cable US Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

I/O View

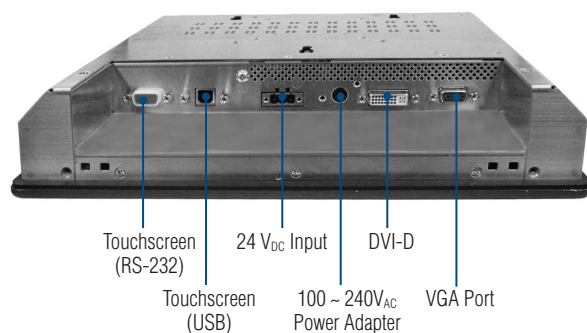

Mounting Method

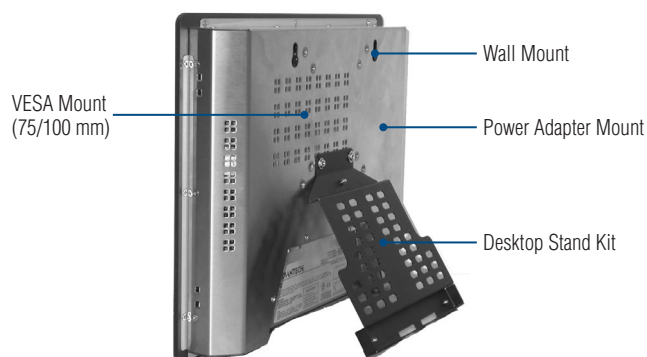



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

Get in touch with us
on social media!

