


# IDK-1107W

## 7" WVGA/WSVGA Industrial Display kit with Touch Solution

NEW

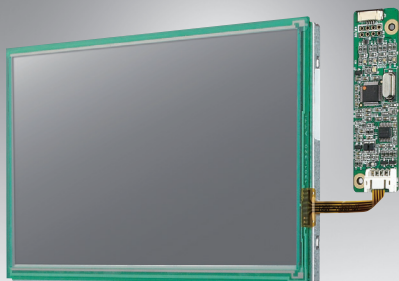

### Features

- 7" LCD supports 800 x 480 & 1024 x 600 pixels and wide operating temperature (-20 ~ 70° C)
- Brightness of 400 & 500 cd/m<sup>2</sup> with LED backlight
- 4-wire resistive touch solution
- High contrast ratio of 1000:1 & 700:1
- High uniformity of 85%
- LVDS signal interface
- Low power consumption 3.35 W & 3.57 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- AR surface treatment (optional)
- Optical bonding (optional)

### Introduction

The Advantech IDK-1107W series comes with a 7" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as anti-reflection surface treatment and optical bonding solution. IDK-1107W series supports 4-wire resistive touch with low power consumption at the maximum of 3.35 W & 3.57 W. IDK-1107W series is ideal for embedded applications that give customers maximum flexibility for mechanical design.


### Specifications

	7" LED backlight panel (WVGA)	7" LED backlight panel (WSVGA)	
LCD Panel	Display Size	7" LED backlight panel (WVGA)	7" LED backlight panel (WSVGA)
	Resolution	800 x 480	1024x600
	Viewing Angle (U/D/L/R)	80° / 80° / 80° / 80°	70° / 75° / 75° / 75°
	Brightness	400 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>
	Backlight Life (hrs)	50,000 hrs	50,000 hrs
	Contrast Ratio	1000 : 1	700:1
	Response Time (ms)	30 ms	25 ms
	Colors	6 Bit (262K)/8 bit (16.2 M)	6 Bit (262K)/8 bit (16.2 M)
	Voltage	3.3 V Power	3.3 V Power
	Consumption	3.35 W	3.57 W
	Signal Interface	1 channel LVDS	1 channel LVDS
	Weight	305 g	190 g
	Dimensions (W x H x D)	170 x 111 x 7.5 mm	165.5 x 104.44 x 8.97 mm
Touch Screen	Touch Screen	4-wire Resistive	4-wire Resistive
	Transparency	82.5± 2.5%	82.5± 2.5%
	Surface Hardness	3H	3H
	Durability	1 million times	1 million times
Environment	Operating Temperature	-5 ~ 60° C	-20 ~ 70° C
	Storage Temperature	-30 ~ 70° C	-30 ~ 80° C
	Humidity	10 ~ 90% @ Max. 38° C, non-condensing	10 ~ 90% @ Max. 25° C, non-condensing


## Dimensions

Unit: mm

### IDK-1107WR-40WVA1E

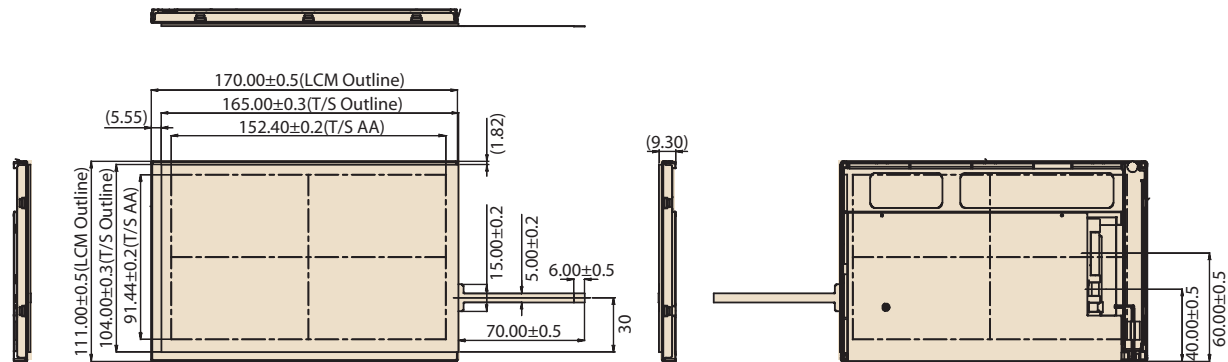

### IDK-1107WR-50WSA1E

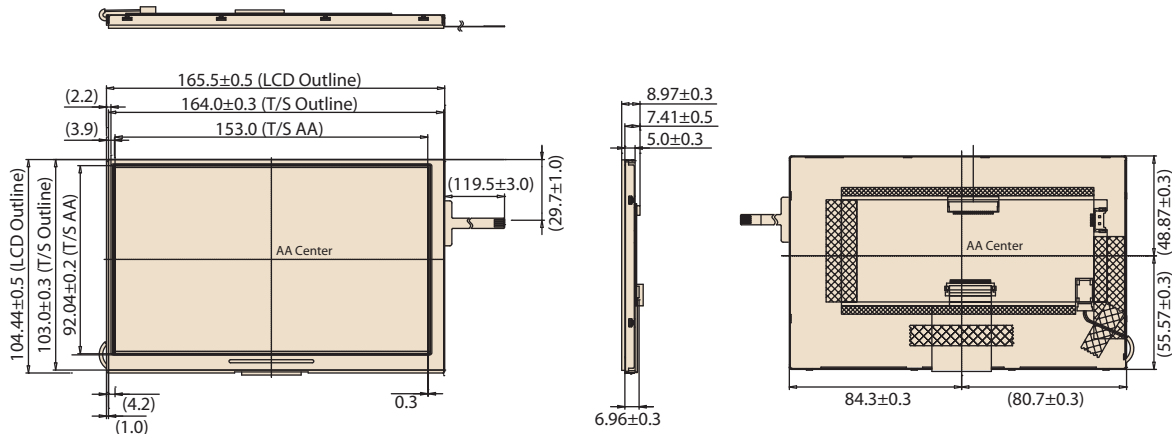

## Ordering Information

Part No.	Size	Brightness (cd/m <sup>2</sup> )	Interface	Touch screen	Touch Interface
IDK-1107WR-40WVA1E	7"	400	LVDS	4-wire Resistive	USB
IDK-1107WR-50WSA1E	7"	500	LVDS	4-wire Resistive	USB

## Optional Order

### For IDK-1107WR-40WVA1E

SBC Part No.	LVDS Cable P/N	Display Interface	B/L Cable P/N	Touch Interface	Touch Power Input
MIO-5250	96CB-L2040PAB4	LVDS: Single channel 18bit	96CB-E0405PAB3	USB	5V
PCM-9363	96CB-L2020PAB2	LVDS: Single channel 18bit	96CB-E0405PAB3	USB	5V
AIMB-270	96CB-L2040PAB4	LVDS: Single channel 18bit	96CB-E0405PAB3	USB	5V

### For IDK-1107WR-50WSA1E

SBC Part No.	LVDS Cable P/N	Display Interface	B/L Cable P/N	Touch Interface	Touch Power Input
MIO-5250	96CB-L2040PID4	LVDS: Single channel 18bit	96CB-E0505PAC3	USB	5V
PCM-9363	96CB-L2020PID2	LVDS: Single channel 18bit	96CB-E0505PAC3	USB	5V
AIMB-270	96CB-L2040PID4	LVDS: Single channel 18bit	96CB-E0505PAC3	USB	5V

## Packing List

Part Number	Description
ETM-RES05C-EEH4EE	1 x 4-wire USB Touch controller
1700020324-01	1x USB Touch cable 5P-2.0/USB-A (M) 180CM

Note: Package contents are subject to change without prior notice

For more compatible embedded board solution, please visit our Build Your Display web page as below:  
<http://www.advantech.com/buildyourdisplay>



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

