

IDK-1121W

21.5" FHD Industrial Display kit with Touch Solution

NEW



Features

- 21.5" LCD supports 1920 x 1080 pixels and wide operating temperature (0 ~ 60° C)
- Brightness of 300 cd/m² with LED backlight
- 5-wire resistive touch solution
- High contrast ratio of 5000:1
- High uniformity of 80%
- LVDS signal interface
- Low power consumption 23 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- AR surface treatment (optional)
- Optical bonding (optional)

Introduction


The Advantech IDK-1121W series comes with a 21.5" industrial grade LCD display with 5-wire resistive touch. The series is also available with flexible options for LCD screen enhancements such as Anti Reflection surface treatment and optical bonding solution. IDK-1121W series supports 5-wire resistive touch with a low power consumption maximum of 26.4W. IDK-1121W series is ideal for embedded applications which need maximum mechanical design flexibility.

Specifications

LCD Panel	Display Size	21.5" LED backlight panel
	Resolution	1920 x 1080
	Viewing Angle (U/D/L/R)	89° / 89° / 89° / 89°
	Brightness	300 cd/m ²
	Backlight Life (hrs)	50,000 hrs
	Contrast Ratio	5000 : 1
	Response Time (ms)	16 ms
	Colors	8bit (16.7 M)
	Voltage	5.0 V Power
	Consumption	24 W
	Signal Interface	2 channel LVDS
	Weight	3100 g
	Dimensions (W x H x D)	495.6 x 292.2 x 20.75 mm
Touch Screen	Touch Screen	5-wire Resistive
	Transparency	80 ± 3%
	Surface Hardness	3H
	Durability	10 million times
Environment	Operating Temperature	0 ~ 60° C
	Storage Temperature	-20 ~ 60° C
	Humidity	5 ~ 90% @ 25° C, non-condensing

Dimensions

Unit: mm

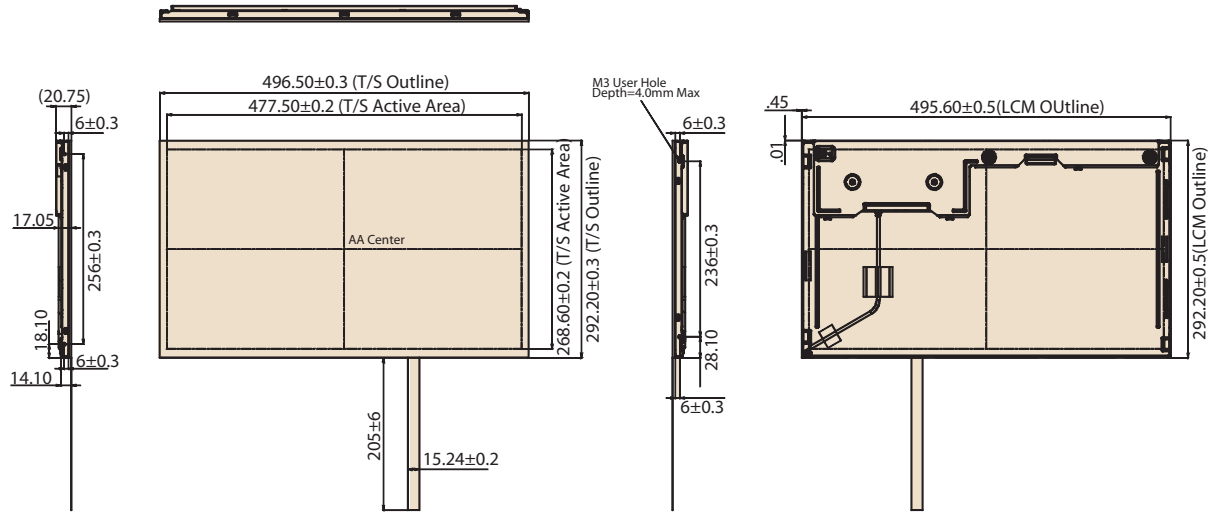

Ordering Information

Part No.	Size	Brightness (cd/m ²)	Interface	Touch screen	Touch Interface
IDK-1121WR-30FHA1E	21.5"	300	LVDS	5-wire Resistive	RS-232/USB

Packing List

Part Number	Description
ETM-RES04C-EEH4EE	1 x 5-wire Touch controller
1700020324-01	1 x USB Touch cable 5P-2.0/USB-A (M) 180CM

Note: Package contents are subject to change without prior notice

Optional Order

SBC Part No.	LVDS Cable Part No.	Display Interface	B/L Cable Part No	Touch Interface	Touch Power Input
MIO-5270	96CB-L3040PAF5	LVDS: Dual channel 24bit	96CB-E0905PAF3 (12V: PWM)	USB	5V
AIMB-270	96CB-L3040PAF5	LVDS: Dual channel 24bit	96CB-E0905PAF3 (12V: PWM)	USB	5V

For more compatible embedded board solutions, please visit our Build Your Display web page:
<http://www.advantech.com/buildyourdisplay>



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

Get in touch with us
on social media!

