

# IDS31-070W

Fully configurable, high-reliability, rugged display solution with choice of brightness, touch and video input 7" Industrial Open Frame Monitor



## Features

- 7" LCD wide screen panel with LED backlight for long service life
- Wide operating temperature 0 ~ +50° C for broad range of applications
- High brightness 400 cd/m<sup>2</sup>
- Flexible mechanical formats: open frame & closed frame, all with VESA standard mounting
- Configurable Options:
  - Brightness 400 cd/m<sup>2</sup>
  - Viewing angle 80°/80°/60°/80°
  - Mechanical housing
  - VGA,DVI,HDMI, DisplayPort
- Touch Options (USB and/or RS232 input):
  - 5-wire rugged analogue resistive
  - Surface Capacitive
  - Projected Capacitive

## Introduction

The IDS31-070W is a fully configurable, flexible display solution, able to be specified in a variety of screen brightness's, touch technologies and video inputs including displayport. The product can be specified in a number of compact mechanical constructions meeting all mounting demands, delivering complete flexibility in product design. All products have been designed to meet the demands of the industrial market and have leading in service performance characteristics guaranteed by 100% product burn-in and the service back up of the global Advantech corporation.

## Typical Applications


- Casino and gaming
- Industrial controls
- Kiosks and point of sale
- Remote signage and public information
- Transportation

## Specifications

Display Features	Spec	Notes
Model	IDS31-070W	
Backlight	LED + TN	Light source
Resolution	800 x 480	Native resolution. Other resolutions supported by A/D card scaling
Brightness	400 cd/m <sup>2</sup>	Measured at typical operating voltage
Viewing Angle	80°/80°/60°/80°	Left/Right/Up/Down
Surface Treatment	3H	MoHS/Anti glare
Contrast Ratio	500:1	In laboratory measurement conditions
Max Colors	264K/16.2m	6/8 bit per colour
Response Time	30 ms	Typical
Backlight Lifetime	50,000 hours	Typ. time to half brightness in room temperature operation

## Dimensions

Unit: mm

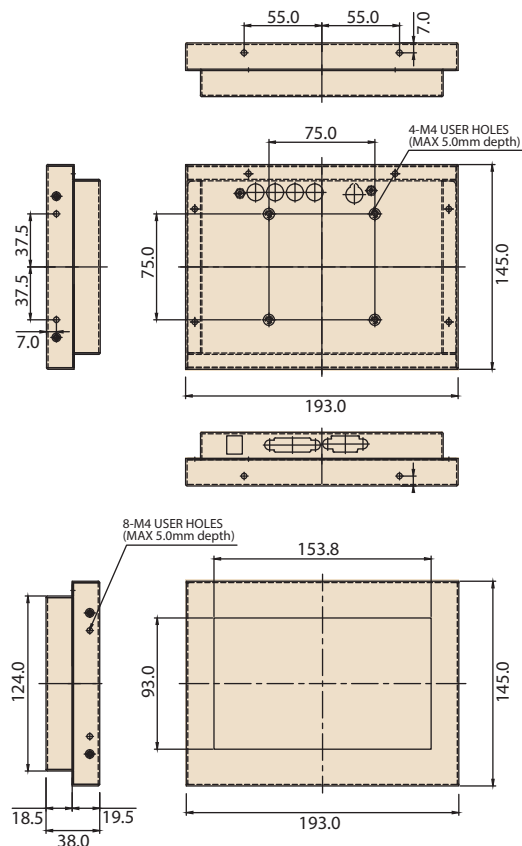

## Touch Screen Options

Type	Cover glass (CG)	Analogue Resistive (AR)	Surface Acoustic Wave (SAW)	Surface Capacitive (SCAP)	Projected Capacitive (PCT)	Infra-red (IR)	Multi-touch
<b>7.0" Wide Screen</b>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Construction	3.2mm heat strengthened glass	ITO film to ITO coated glass	4mm pure glass sensor	Hard coat ITO pure glass	ITO film/film with Chemical strengthened glass	3mm tempered glass with infrared sensor	Either PCT or IR
Surface Durability (no of touches)	7H	3H	7H	<4H	<4H	7H	-
IP Rating (potential)	-	> 1m	>5m	>1m	>1m	>1m	-
IP Rating (potential)	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Touches	0	1	1	1	1/2/10/30	1040g/63.5mm	-
Transparency	93±2%	81%	90±5%	91±1.5%	82%	-	-
Drop Ball	500g / 50cm	227g/38Φ steel ball from 80cm height	1040g / 90cm	UL60950 (Tough touch only)	227g/38Φ steel ball from 80cm height	1040g/63.5mm ball dropped from height of 1.0m	227g/38Φ steel ball from 80cm height
Added thickness (typ.)	4/5/6/10/12mm	1.8mm	6mm	8mm	3/4/5/6m	See drawing	See drawing
Custom Options	AR coating Optical bonding	Optical bonding	Dustproof, Waterproof, Antiglare, Safe touch	Optical bonding, Tough touch	AR coating, Glass painting, Customer logo, 10point touch (21.5",23",24"), Optical bonding	2point, AR coating, Optical bonding	Extended cover glass Back printing Whole cutting

## System/Electrical Features

System / Electrical	Spec	Unit / Notes
Power Consumption	8.0W	Typical consumption at standard brightness and temperature
Power Supply	12V / 3.5A	External DC power brick (included) Input voltage-DC +12V +/-5% @ 2.5A max Power connector: DC jack
Video Input (available options)	<ul style="list-style-type: none"> <li>▪ VGA</li> <li>▪ DVI</li> <li>▪ HDMI</li> <li>▪ COMPOSITE</li> <li>▪ USB</li> <li>▪ DisplayPort</li> </ul>	Native resolution. Other resolutions supported by A/D card scaling
On-screen Display (OSD)	5- keys Menu Functions	Menu / up / down / enter / Power ON-OFF Brightness, Contrast, Screen Setting, Colour Temp, Language OSD Settings, VGA/DVI, Recall, Auto Adjust
Custom BIOS options		

## Mechanical Features

Mechanical	Spec	Notes
Overall size:	193 x 145 x 38 mm	Including open frame, closed frame and proflat formats
Active Area Size	152.40 (H) x 91.44 (V) mm	
Case / Bezel color	Zintec / Black power coat	Custom colour and finishes available
Weight	2.7kg	Typ .inc touch
VESA Mounting Options:	<input checked="" type="checkbox"/> 75 x 75 <input type="checkbox"/> 100 x 100 <input type="checkbox"/> 100 x 200 <input type="checkbox"/> Brackets for panel mount	For User defined mounting requirements contact rep

## Environmental Features

Environmental	Spec
Operating Temp	0 ~ +50° C
Storage Temp	-20 ~ +60° C
Humidity	90% RH
Vibration	5-500Hz, 0.026G/Hz, 2.16 Grms, X,Y,Z. 1hr per axis
Agency Approvals	CE,RoHS

## Ordering Information

Model Name	Description
IDS31-070W540DVA1E	7" wide screen, Industrial open-frame monitor with 5-wire AR touchscreen, 400CD/m <sup>2</sup> brightness, VGA&DVI input

All Advantech monitors are configurable to order. Use [www.advantech.com](http://www.advantech.com) for guidance on versions, pricing and deliver for all models

## Accessory Package

- Power supply (110V-240V), UK/EU/US power cord, VGA cable, DVI cable (USB for touch option)



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

