ACP-2000/ IPC-602

2U 6-Slot Rackmount Chassis with Front USB and PS/2 Interfaces



Features

- 2U rackmount chassis supports up to 6 cards
- Butterfly backplane design
- Front-accessible USB and PS/2 connectors
- 250W / 300W AC ATX and DC power supply options
- Two 40 CFM cooling fans with air filter
- Lockable front door prevents unauthorized access

Features with ACP-2000 only:

- System alarm notification by front LED indicators
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

C E FCC ROHS

Specifications

| | | External | Internal |
|----------------------------------|---|---|----------------------------------|
| Drivo Roy | Slim Optical Disk Drive | 1/- | - |
| Drive Bay | 3.5" | 2/1 | -/1 |
| | 5.25" | -/1 | - |
| Cooling | Fan | 2 (8 cm / 47 CFM each) / 2 (8 cm / 40 CFM each) | |
| Cooling | Air Filter | Yes | |
| Front I/O Interface | USB | 2 | |
| FIUIL I/O IIILEIIAGE | PS/2 | 1 | |
| Miscellaneous | LED Indicators | Power and HDD activity; fan and temperature for ACP-2000 only | |
| Miscellatieons | Rear Panel | One 9-pin D-Sub opening | |
| Intelligent System Module Remote | CPU/System fan speed , CPU/System temper | rature, motherboard voltage | |
| Monitoring | (Only selected Advantech MBs/CPU cards with SUSIAccess installed can fully enable these functions, check with Advantech local rep. for detailed information.) (This feature only enabled in ACP-2000) | | |
| | (This location only chabled in Not 2000) | Operating | Non-Operating |
| | Temperature | 0 ~ 40° C (32 ~ 104° F) | -20 ~ 60° C (-4 ~ 140° F) |
| Environment | Humidity | 10 ~ 85% @ 40° C, non-condensing | 10 ~ 95% @ 40° C, non-condensing |
| | Vibration (5 ~ 500 Hz) | 0.5 Grms | 2 G |
| | Shock | 10 G (with 11 ms duration, half sine wave) | 30 G |
| Dhysical Characteristics | Dimensions (W x H x D) | 482 x 88 x 451 mm (19" x 3.5" x 17.8") | |
| Physical Characteristics | Weight | 11.5 kg (25.3 lb) / 11.3 kg (24.9 lb) | |

Front View


IPC-602




ACP-2000



Inside View



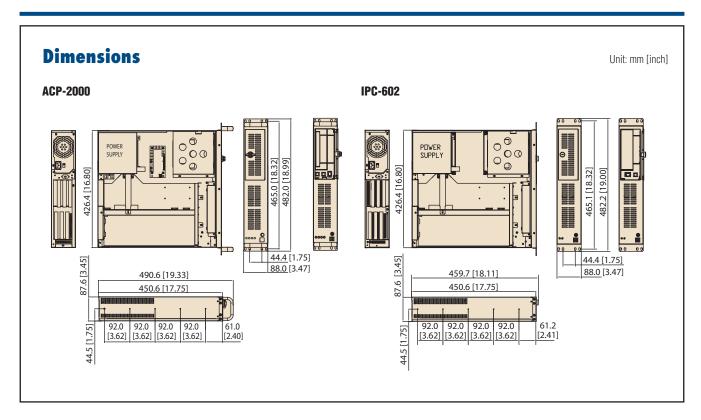

Ordering Information

| Part Number | Power Supply | Backplane |
|------------------|---------------------------------------|------------------------------|
| PICMG 1.0 | | |
| ACP-2000P3-00BE | Without power supply, with ATX switch | 989K610622E (PCA-6106P3V) |
| ACP-2000P4-00BE | Without power supply, with ATX switch | 989K610512E (PCA-6105P4V) |
| PICMG 1.3 | | |
| ACP-2000EBP-00BE | Without power supply, with ATX switch | - |
| IPC-602EBP-00XBE | Without power supply, with ATX switch | - |

Power Supply Options

| Part Number | 80 Plus Grade | Wattage | Туре | Input |
|--|------------------|---------|--------------------|--------------------------------|
| PS8-250ATX-ZE (IPC-602 only) | Bronze | 250W | Single | AC 100 ~ 240 V (full range) |
| PS8-300ATX-ZBE | Bronze | 300W | Single | AC 100 ~ 240 V (full range) |
| PS8-400ATX-ZE | Bronze | 400W | Single | AC 100 ~ 240 V (full range) |
| PS-300ATX-DC48E (ATX) | - | 300W | Single | DC -48 V |
| RPS-300ATX-ZE (ATX, PFC) (ACP-2000 only) | - | 300W | (1+1) Redundant | AC 100 ~ 240 V (full range) |

Optional Accessories

| Part Number | Description |
|--------------------|---|
| 1950000868T00B | P3 card cage |
| 1950000869N002 | P4 card cage |
| 96CB-SATAPOWER-6P1 | SATA power wire 6-pin to big 4-pin (for slim ODD) |
| IDT-3120E | Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays |

Spare Parts

| Part Number | Description |
|----------------|---|
| 2130006189S000 | Filter behind the door 156 x 45 x 5 mm |
| 1990001949 | Filter in the front of the fans 165 x 58 mm |



www.L-TronDirect.com 800-830-9523 info@L-Tron.com

