


PCI-1762

16-ch Relay and 16-ch Isolated Digital Input PCI Card

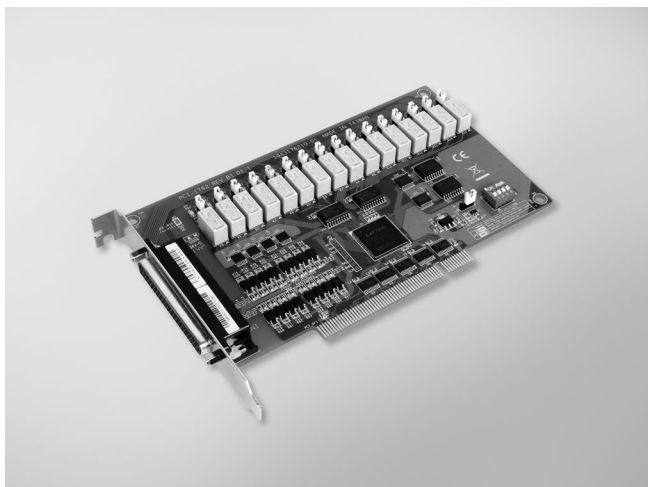

FCC CE

Features

- 16 opto-isolated digital input channels
- 16 relay actuator output channels
- LED indicators to show activated relays
- Jumper selectable dry contact/wet contact input signals
- BoardID switch

Introduction

The PCI-1762 provides 16 opto-isolated digital inputs with isolation protection of 2,500 V_{DC} for collecting digital inputs in noisy environments, 16 relay actuators that can be used as a on/off control devices or small power switches.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

Specifications

Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 3.0 V max.
Logic 1: 10 V min. (50 V max.)
- **Interrupt Capable Ch.** 2 (ID10, ID18)
- **Isolation Protection** 2,500 V_{DC}
- **Opto-Isolator Response** 100 μ s
- **Input Resistance** 5.7 k Ohm 1 W

Relay Output

- **Channels** 16
- **Relay Type** Form A or Form B (Jumper selectable)
- **Contact Rating** 0.5 A @ 250 V_{AC}, 0.5 A @ 30 V_{DC}
- **Max. Switching Power** 125 VA, 15 W
- **Max. Switching Voltage** 250 V_{AC}, 220 V_{DC}
- **Operate Time** Typical: 3 ms, Max.: 5 ms
- **Release Time** Typical: 2 ms, Max.: 4 ms
- **Resistance** Contact: 50 m Ohm max.
- **Life Expectancy** 2 x 10⁵ cycles min. @ 0.5A/ 250V_{AC}

General

- **I/O Connectors** 1 x DB62 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 250 mA
Max.: 5 V @ 620 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

Ordering Information

- **PCI-1762** 16-ch Relay and 16-ch Isolated Digital Input PCI Card

Accessories

- **PCL-10162-1E** DB62 Cable, 1 m
- **PCL-10162-3E** DB62 Cable, 3 m
- **ADAM-3962** DB62 DIN-rail Wiring Board



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

Get in touch with us
on social media!

