


PCLD-786

PCLD-7216

8-ch SSR I/O Module Carrier Board

16-ch SSR I/O Module Carrier Board

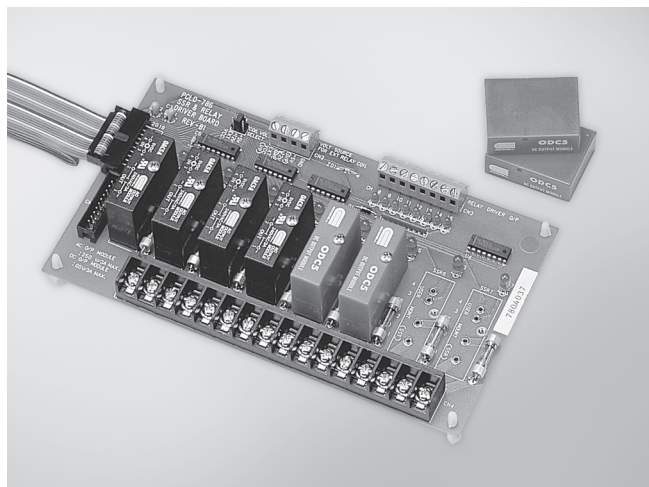

PCL-10120-1

PCLD-786

PCLM-ODC5

Features

- Up to eight AC or DC solid state relays
- Photo-coupler isolated operation
- Eight external relay drivers
- LED status indicators

Specifications

AC Solid State Relays

- 1 Cycle Surge 40 A
- Blocking Voltage ± 600 V min.
- Off Leakage Current 8 mA max.
- On-state Voltage 1.6 V max.
- Output Rating 24 ~ 280 V_{AC} @ 3.0 A
- Turn On zero volts
- Turn On/Turn Off Time < 1/2 cycle
- Type PCLM-OAC5A

DC Solid State Relays

- 1 Second Surge 5 A
- OFF Leakage Current 1 mA max.
- ON-state Voltage 1.4 V max.
- Output Rating 5 ~ 60 V_{DC} @ 3.0 A
- Turn On/Turn Off Time 750 μ s max.
- Type PCLM-ODC5

External Relay Drivers

- Channels 8
- Coil Driving Voltage 5 V, 12 V from PC or external source
- Driver Type ULN2003, open collector type
- Max. Driving Current 125 mA each channel

General


- Dimensions (L x W) 205 x 114 mm (8.1" x 4.5")

Ordering Information

- PCLD-786 8-ch SSR I/O Module Board w/ 20-pin Flat Cable

Note: PCLD-786 does not include SSRs. They must be ordered by selecting single piece SSR modules according to your requirements.

- PCLM-OAC5A Single Piece AC SSR Module (280 V_{AC}, 3 A)
- PCLM-ODC5 Single Piece DC SSR Module (60 V_{DC}, 3 A)

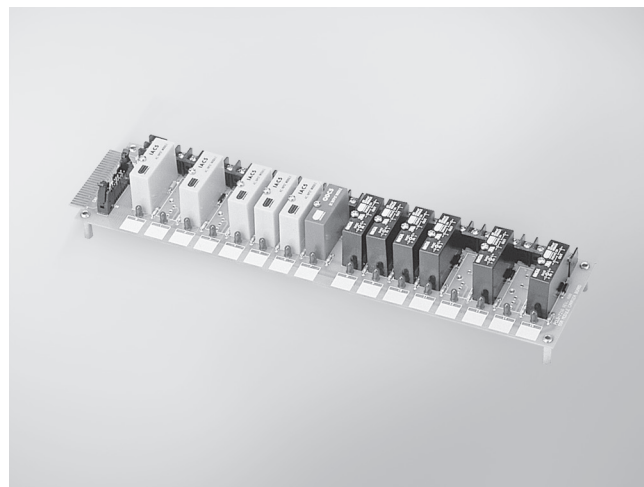

PCLD-7216

Features

- Channel status reflected by onboard LED for easy monitoring
- Onboard fuse protection

Specifications

Module Type		Field Side		Logic Side
Output Modules	Part No.	Output Voltage Rating	Output Current Rating	Input Logic and SSR Status
AC Output	PCLM-OAC5A	24 ~ 280 V _{AC}	3.0 A	TTL low (On)
		12 ~ 280 V _{AC}		TTL high (Off)
DC Output	PCLM-ODC5	5 ~ 60 V _{DC}	3.0 A	TTL low (On)
				TTL high (Off)
Input Modules	Part No.	Input On Voltage	Input Off Voltage	Output Logic and On/Off Status
AC Input	PCLM-IAC5A	180 ~ 280 V _{AC}	< 80 V	TTL low (On)
				TTL high (Off)
DC Input	PCLM-IDC5B	3 ~ 32 V _{DC}	< 1 V	TTL low (On)
				TTL high (Off)

Input Modules

Field Side:

- Input On/Off Voltage Range PCLM-IAC5: 90 ~ 140 V/45 V_{RMS}
PCLM-IAC5A: 180 ~ 280 V/80 V_{RMS}
PCLM-IDC5B: 3 ~ 32 V/1 V_{DC}
- Input Resistance PCLM-IAC5: 14 k Ω , PCLM-IAC5A: 44 k Ω ,
PCLM-IDC5B: 1.5 k Ω
- Turn On/Off Time PCLM-IAC5: 20 msec. max., PCLM-IAC5A: 20 msec. max.
PCLM-IDC5B: 100 msec. max.

Logic Side:

- Breakdown Voltage 30 V_{DC}
- Output Current 100 mA max.
- Output Voltage Drop 0.4 V max.
- Supply Current 12 mA max.
- Supply Voltage 4 ~ 6 V

Output Modules

Field Side:

- Current Rating 3 A max. (@ 25°C)
- Contact Voltage Drop 1.6 V max.
- Turn On/Off Time PCLM-OAC series: 1/2 AC cycle max.
PCLM-ODC series: 100 μ sec/750 μ sec. max.

Logic Side:

- Input Resistance 220 Ω
- Supply Voltage 4 ~ 6 V
- Supply Current 12 mA max.

General

- Logic Side Connectors 50-pin edge connector, Opto-22 compatible
- Dimensions (L x W x H) 367 x 111 x 56 mm (14.4" x 4.4" x 2.2")

Ordering Information

- PCLD-7216 16-ch SSR I/O Module Carrier Board

Note: PCLD-7216 does not include SSRs. They must be ordered by selecting single piece SSR modules according to your requirements.



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

Get in touch with us
on social media!

