Webop-2050T 5.6" QVGA Operator Panel with Webop Designer Software





Features

- Various LCD sizes (4.3", 5.6", 7", 8", 10.1")
- Supports ARM9-based CPUs with 200MHz and 128MB flash memory
- Supports RTC, battery backup RAM, and Ethernet-based operator panels
- Supports runtime data downloads through Serial, Ethernet, USB
- Supports adjustable brightness controls via touch panel
- Reliable firmware for 24/7 operation
- Supports Windows XP/7/Vista-based WebOP Designer development tool
- Easy to switch one application to different LCD sizes in seconds
- Supports vertical and horizontal application screen rotation
- Supports over 400 PLC industrial communication protocols
- Communicates with up to four types of devices
- Panel mounting for machinery
- Front panel is IP66 compliant

Introduction

To satisfy the stringent standards required in the automation market, especially packaging, label slitting, and motion-based robot dispensing, Advantech offers the WebOP-2000T series with 200MHz ARM9-based RISC CPU's and 128MB flash memory for application software. The WebOP-2000T series also support a variety of LCD sizes from 4.3" to 10.1" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. The WebOP-2000T series is bundled with WebOP Designer: a software development kit which helps create application solutions for labor-saving, improved efficiency of manufacturing and easy control of every machine in the factory. WebOP Designer offers an outstanding price performance ratio for various markets such as conventional operator panels, HMI + Low mini SCADA systems, and HMI + communication gateways.

Specifications

General

Certification CE. BSMI. CCC. UL. FCC Class A Dimensions (WxHxD) 188 x 143.3 x 30 mm (7.4" x 5.64" x 1.18") Cut-out Dimensions 175 x 132.5 mm (6.89" x 5.21")

• Front Panel Thickness 6mm

 Operating System HMI RTOS, WebOP Designer

■ Power Supply Voltage 24V_{DC} ±10% Power Consumption 10W Enclosure Housing Plastic - Mounting Panel

0.51 kg (1.12 lbs) Weight (Net)

System Hardware

- CPU RISC 32bits, 200MHz

Battery Backup Memory 128KB

8MB + 128M NAND flash Flash Memory

■ Power-On LED Yes Communication LED Nο Front USB Access No

Communication Interface

- COM1 RS-232/422/485 (DB9 Female) - COM2 RS-422/485 (5-Pin Plug Connector)

 COM3 RS-232 (Com1: Pin5;7;8)

Ethernet (RJ45) None

USB Client I/Os Yes

USB Host Yes Micro-SD Slot

LCD Display and Touchscreen

Display Type QVGA TFT LCD Display Size 5.6" Max. Resolution 320 x 234 Max. Colors 65,536 colors Luminance (cd/m²) 330

Backlight Life LED, 20,000 hrs Dimming Adjustable by touch panel Touchscreen 4 wire analog resistive

Environment

• Operating Temperature $0 \sim 50^{\circ}\text{C} (32 \sim 122^{\circ}\text{F})$ Storage Temperature -20 ~ 60°C (-4 ~ 140°F)

 Humidity 10 ~ 90% RH @ 40°C, non-condensing


 Ingress Protection Front panel:IP66

 Vibration Protection Operating, radom vibration 1 Grms (5 ~ 500 Hz)

Ordering Information

WOP-2050T-S1AE 5.6" QVGA, 32 MB (SDRAM), 8MB (NOR) &

128MB (NAND)

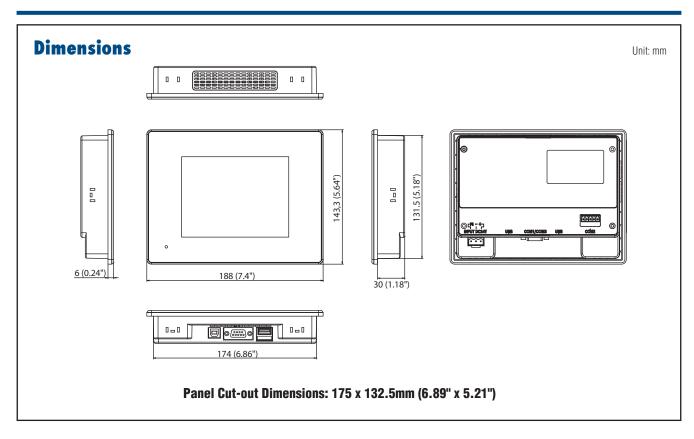

Accessories

• **CWOP-P2HFM-AD12E** PC to HMI program download cable, DB9/2m CWOP-P2HAB-ADU2E PC to HMI program download cable, USB/2m ■ PWR-247-BE 63W DC 24V/2.62A Output Power Supply **1702002600** Power Cable US Plug 1.8 M **1702002605** Power Cable EU Plug 1.8 M **1702031801** Power Cable UK Plug 1.8 M

1700000596 Power Cable China/Australia Plug 1.8 M


Rear View





Communication Links
















www.L-TronDirect.com 800-830-9523 info@L-Tron.com

