



# RFS6000

## Wireless LAN Switch/Controller

Enabling a secure and reliable Wireless Enterprise for medium to large deployments



### FEATURES

#### Wi-NG Operating System — delivering a unified voice, data and RF management platform

Improve business process flow with one platform for wireless voice, video, data and multiple RF technologies — such as RFID, Wi-Fi (including 802.11n) and future technologies such as Wi-MAX; rich enterprise-class functionality includes seamless roaming across L2/L3 deployments, resilient failover capabilities, comprehensive security, toll-quality voice and other value-added services, such as multi-RF locationing

#### Role-based wired/ wireless firewall

Comprehensively secures and protects the wired and wireless network against attacks and unauthorized access at Layer 2 and Layer 3 with stateful inspection; ability to create identity and location-based policies provides granular control of network access

#### Wireless LAN (WLAN) switch/controller and voice communications platform

The RFS6000 Enterprise WLAN Switch/controller from Motorola enables the wireless enterprise by offering an integrated WLAN communication platform that delivers secure and reliable voice, video and data applications. Designed on the innovative and modular Wi-NG operating system, the RFS6000 provides wired and wireless networking services, multiple locationing technologies such as Wi-Fi and RFID; resiliency via 3G/4G wireless broadband backhaul; and high performance with 802.11n networks. The enterprise class RFS6000 delivers the best in class performance, security, scalability and manageability required to meet the needs of demanding mission critical business applications.

#### Cost-effective centralized management

Based on Motorola's landmark Wireless Next Generation (Wi-NG) operating system, the RFS6000 provides the tools you need to simplify and minimize the costs associated with real-time management of mobility solutions. The Wi-NG architecture provides unified management of network hardware, software configuration, and network policies, complete with built-in process monitors and troubleshooting tools. In conjunction with the RF Management Suite (sold separately), the RFS6000 provides centralized control over the entire lifecycle of your Motorola mobility solution — allowing you to easily design, deploy, monitor and secure your wireless network.

#### Raising the bar on enterprise class performance and network resiliency

The RFS6000 offers a multicore, multithreaded Wi-NG architecture capable of supporting 2,000 to 20,000 mobile devices and up to 48 dual radio 802.11 a/b/g thin access points or 256 adaptive access points (AP-5131 a/b/g or AP-7131 a/b/g/n) per switch/controller. Motorola's patent pending clustering technology allows a 12X capacity increase, for build-as-you-grow networks. The result is an architecture that is purpose-built to deliver high availability — and scalability. In addition, a user accessible ExpressCard™ Slot supports 3G broadband cards for a redundant wireless WAN backhaul connection, providing a truly self-sustainable wireless enterprise.

#### Gap-free security for the Wireless Enterprise

Comprehensive network security features keep wireless transmissions secure and provide compliance for HIPAA and PCI. The RFS6000 provides gap-free security for the WLAN network, following a tiered approach to protect and secure data at every point in the network, wired or wireless. This complete solution includes a wired/wireless firewall, a built-in wireless intrusion protection system (IPS), an integrated IPSec VPN gateway, AAA Radius Server and secure guest access with a captive web portal, reducing the need to purchase and manage additional infrastructure. Additional security features include MAC-based authentication, 802.11w to secure management frames, NAC support, anomaly analysis and more.

### Adaptive AP: extending the enterprise

Enables centralized management of mesh access points at remote sites including automatic firmware upgrades; provides site survivability for remote locations with 802.11a/b/g/n networks for unparalleled resiliency

### SMART RF Management

Next generation self-healing: enables the WLAN to automatically and intelligently adapt to changes in the RF environment to eliminate unforeseen gaps in coverage

### Wireless Intrusion Prevention System

The built-in WIPS system provides defense against over-the-air attacks by leveraging the sensing capabilities of AP300/AP51x1/AP7131

### Real Time Locationing System (RTLS)


Provides rich locationing services to enable real-time enterprise asset-tracking through support for 802.11, RFID and third party locationing solutions — including industry leaders AeroScout, Ekahau, and Newbury Networks. Standards-based support for: EPC Global ALE interface for processing and filtering data from all active and passive tags; and EPC Global LLRP interface for passive RFID tag support

### Clustering and failover features

Supports multiple levels of redundancy and failover capabilities to ensure high availability networks; provides a single virtual IP (per VLAN) for the cluster for use as default gateway by mobile devices/wired infrastructure, on-board DHCP/AAA server synchronized failover; multi-platform license sharing enables deployment of cost-effective networks

## RFS6000 network architecture

The RFS6000 offers the comprehensive functionality necessary to extend wireless voice, video and data access inside medium to large enterprises — as well as to remote locations such as branch offices.

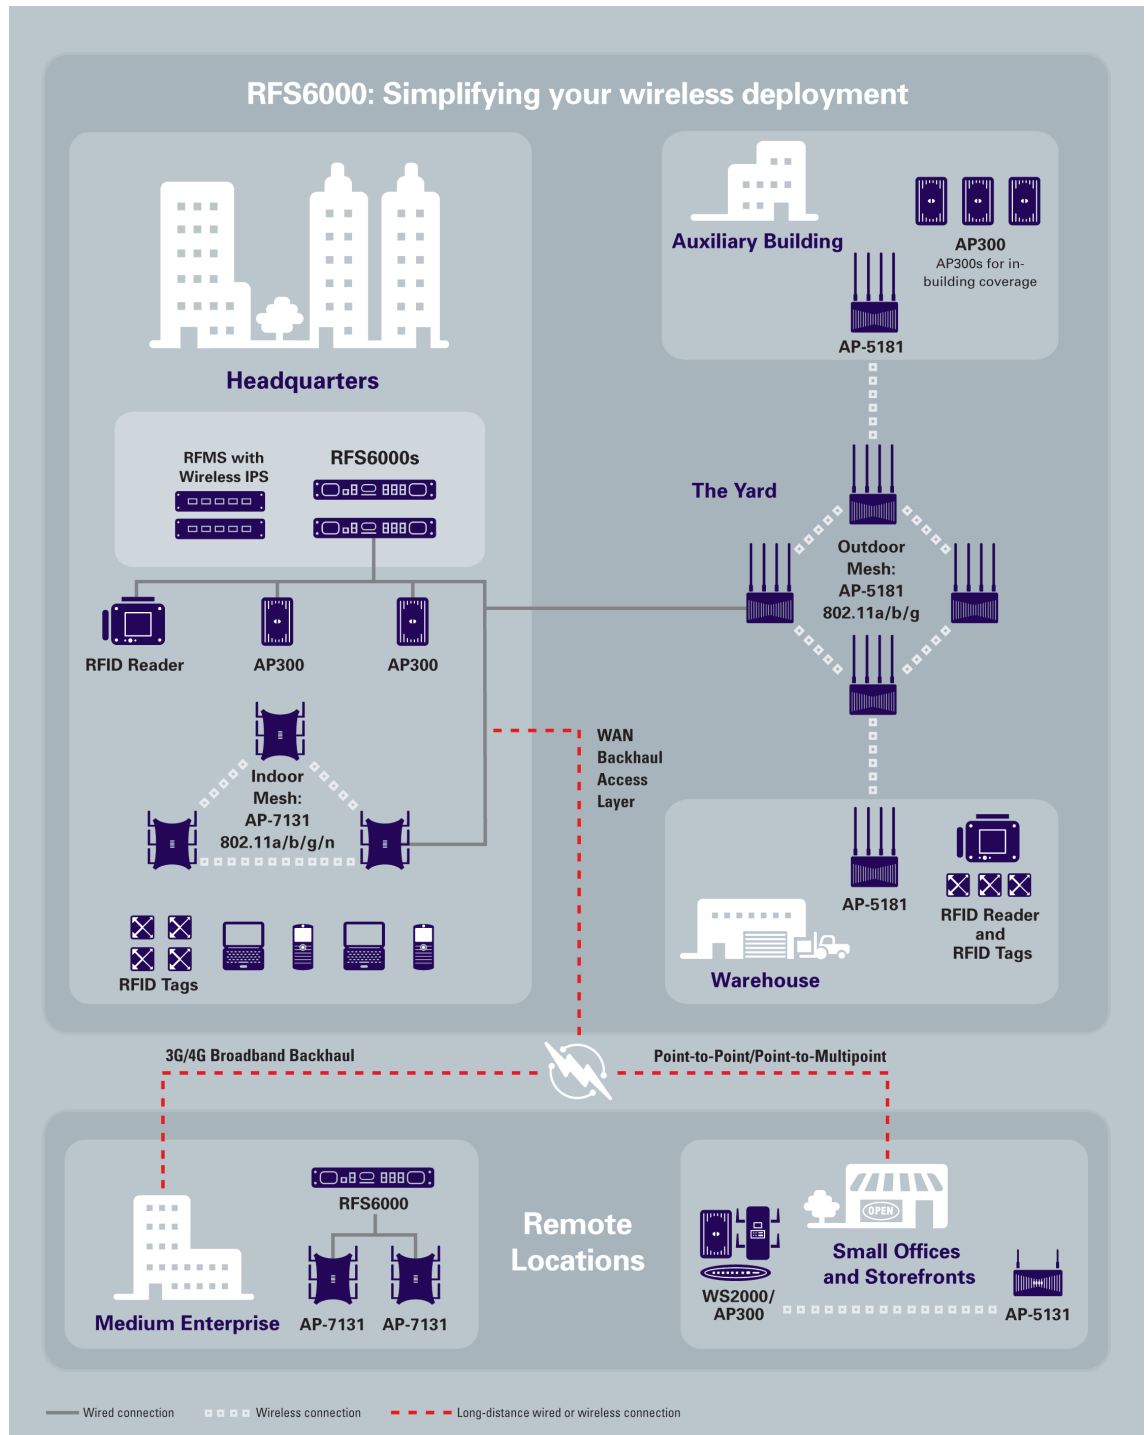

## Enabling toll-quality voice for the Wireless Enterprise

Support for VoWLAN provides cost-effective voice services throughout the wireless enterprise, enabling push-to-talk and more for employees inside the four walls as well as outside. The rich feature set provides granular control over the many wireless networking functions required to deliver high performance persistent clear connections with toll-quality voice. Quality of Service (QoS) ensures superior performance for voice and video services. WMM Admission Control, including TSPEC, SIP Call Admission Control, and 802.11k radio resource management, ensures dedicated bandwidth for voice calls as well as better control over active voice calls for a variety of VoIP handsets. In addition, the fixed mobile convergence (FMC) ready RFS6000 provides support for third-party solutions and future services, including the extension of the desk phone to mobile devices over the WLAN and WWAN.

## Adaptive AP for increased network flexibility — and site survivability

The RFS6000 simplifies and reduces the cost of extending mobility to remote and branch offices as well as telecommuters. Motorola's Independent Mesh Access Points (AP-51X1 a/b/g and AP-7131 a/b/g/n) can be deployed at remote locations yet centrally managed in the Network Operations Center (NOC) through the RFS6000 (single switch or a cluster for scalability). An IPSec VPN tunnel secures all traffic between the access points and the wireless switch. Remote Site Survivability (RSS) mesh access points deliver secure uninterrupted wireless service — providing unparalleled resiliency that survives a WAN link outage.

## Put your RF on autopilot

The Wi-NG architecture delivers SMART RF Management, which provides the dynamic RF tuning required for optimal network performance. This feature takes self-healing to the next level, dramatically reducing network monitoring IT costs by enabling the WLAN to intelligently adapt to the ever-changing RF environment.

The ability to dynamically adjust the power and channels on any thin access point automatically eliminates the gaps in coverage that occur when an AP fails or there is a change in your environment — for example, the introduction of an increased volume of liquid or metal — all without any physical intervention. The elegant feature protects against under- or over-powering — scenarios that could reduce performance and network availability. And adjustments are completely transparent — there is no impact on voice calls and data sessions in progress — protecting the quality of service and the user experience to ensure user productivity.

## Maximize benefits — and minimize costs

All the enterprise class services such as security, voice, performance and resiliency are built into the Wi-NG architecture — the innovative and modular operating system (OS) for the RFS6000. These comprehensive services come at no additional cost and are packaged together to make mobility work — even better.

## End-to-end support

As an industry leader in mobility, Motorola offers the experience gained from deploying mobility solutions all over the globe in many of the world's largest enterprises. Leverage this expertise through Motorola Enterprise Mobility Services, which provides the comprehensive support programs you need to deploy and maintain your RFS6000 at peak performance. Motorola recommends protecting your investment with 'Service from the Start Advance Exchange Support', a multi-year program that provides the next-business-day device replacement, technical software support and software downloads you need to keep your business running smoothly and productively. This service also includes 'Comprehensive Coverage', which covers normal wear and tear, as well as internal and external components damaged through accidental breakage — significantly reducing your unforeseen repair expenses.

For more information, visit us on the web at [www.motorola.com/rfs6000](http://www.motorola.com/rfs6000) or access our global contact directory at [www.motorola.com/enterprisemobility/contactus](http://www.motorola.com/enterprisemobility/contactus)

## 3G Wireless for WAN Backhaul

Support for 3G wireless cards to backhaul WAN traffic when the primary WAN Link fails

## Enhanced End-to-End Quality of Service (QoS)

Enhances voice and video capabilities; prioritizes network traffic to minimize latency and provide optimal quality of experience; SIP Call Admission Control and Wi-Fi Multimedia Extensions (WMM-Power Save) with Admission Control enhances multimedia application support and improves battery life and capacity; network optimization through granular bandwidth contracts based on bandwidth utilization network load and number of users for different applications being used, in different locations; TSPEC Admission Control ensures ample bandwidth and a superior user experience for VoIP calls

## True mobility

Virtual AP provides better control of broadcast traffic and enables multiple mobile and wireless applications with quality of service when network is congested; Pre-emptive Roaming ensures Motorola mobile devices roam before signal quality degrades; Power Save Protocol optimizes battery life

# RFS6000 Specifications

### Packet Forwarding

802.1D-1999 Ethernet bridging; 802.11-802.3 bridging; 802.1Q VLAN tagging and trunking; proxy ARP; IP packet steering-redirection

### Wireless Networking

|                       |  |
|-----------------------|--|
| Wireless LAN:         | Supports 32 WLANs; multi-ESS/BSSID traffic segmentation; VLAN to ESSID mapping; auto assignment of VLANs (on RADIUS authentication); power save protocol polling; pre-emptive roaming; VLAN Pooling and dynamic VLAN adjustment; IGMP Snooping |
| Bandwidth management: | Congestion control per WLAN; per user based on user count or bandwidth utilization; dynamic load balancing of AP300s and Adaptive APs in a cluster; bandwidth provisioning via AAA server  |

Layer 2 or Layer 3 deployment of thin access ports and Adaptive AP AP-51X1 802.11a/b/g and AP-7131 802.11a/b/g/n access points

Layer 3 Mobility (Inter-Subnet Roaming)

IPv6 client support

Thin Access Ports: Supports 1-48 "thin" 802.11a/b/g AP300 access points for L2 or L3 deployment per RFS6000 Switch/controller and 576 802.11a/b/g AP300s per cluster; Legacy support: AP100 for L2 deployments only

Adaptive AP: Supports adoption of 256 adaptive AP-51X1 802.11a/b/g and AP-7131 802.11a/b/g/n access points in adaptive mode per RFS6000 Switch/controller and 3,072 per cluster; multiple country configuration support; Legacy support: AP-4131 port conversion for L2 deployments only

*Continued on back*

## SPECIFICATION SHEET

RFS6000

Enabling a secure and reliable Wireless Enterprise for medium to large deployments

### RFS6000 Part Numbers:

**RFS-6010-100R0-WR:**  
Zero Port Wireless Switch

**RFS-6010-10010-WR:**  
8 Port Wireless Switch

**RFS-6010-10030-WR:**  
24 Port Wireless Switch

**RFS-6010-10060-WR:**  
48 Port Wireless Switch

**RFS-6010-UC-08-WWR:**  
8 Port RFS6000 Series  
Upgrade Certificate

**RFS-6010-ADSEC-LIC:**  
RFS6000 License for  
Advanced Security

**RFS-6010-ADP-128:**  
RFS6000 Licenses for 128  
Adaptive Access Points

**RFS-6010-ADP-16:**  
RFS6000 Licenses for 16  
Adaptive Access Points

**RFS-6010-ADP-256:**  
RFS6000 Licenses for 256  
Adaptive Access Points

**RFS-6010-APPL-LIC:**  
RFS6000 License for the  
Location Application License

**RFS-3G-BKHL-LIC:**  
RFS6000 License for Wireless  
WAN support

|  |   |
|--|---|
| Power-over-Ethernet:   | Integrated; up to 29.7 watts per Ethernet port, up to a maximum of 180 watts for simultaneous operation   |
| Radio frequency automatic channel select (ACS); Transmit power control management (TPC); Country code-based RF configuration; 802.11b, 802.11g 802.11a, and 802.11n  |   |
| <b>Network Security</b>  |   |
| Role-based wired/wireless firewall (L2-L7) with stateful inspection for wired and wireless traffic; Active firewall sessions — 100,000 per RFS6000 Switch/controller and 1,200,000 per cluster; protects against IP Spoofing and ARP Cache Poisoning |   |
| Access Control Lists (ACLs): L2/L3/L4 ACLs   |   |
| Wireless IDS/IPS:  | Multi-mode rogue AP detection, Rogue AP Containment, 802.11n Rogue Detection, Ad-Hoc Network Detection, Denial of Service protection against wireless attacks, client blacklisting, excessive authentication/association; excessive probes; excessive disassociation/deauthentication; excessive decryption errors; excessive authentication failures; excessive 802.11 replay; excessive crypto IV failures (TKIP/CCMP replay); Suspicious AP, Authorized device in ad-hoc mode, unauthorized AP using authorized SSID, EAP Flood, Fake AP Flood, ID theft, ad-hoc advertising Authorized SSID |
| Geofencing:  | Add location of users as a parameter that defines access control to the network   |
| WIPS sensor conversion:  | Supported on the AP300 and the Adaptive AP-5131 and AP-7131   |
| Anomaly Analysis:  | Source Media Access Control (MAC) = Dest MAC; Illegal frame sizes; Source MAC is multicast; TKIP countermeasures; all zero addresses  |
| Authentication:  | Access Control Lists (ACLs); pre-shared keys (PSK); 802.1x/EAP—transport layer security (TLS), tunneled transport layer security (TTLS), protected EAP (PEAP); Kerberos Integrated AAA/RADIUS Server with native support for EAP-TTLS, EAP-PEAP (includes a built in user name/password database; supports LDAP), and EAP-SIM   |
| Transport encryption:  | WEP 40/128 (RC4), KeyGuard, WPA—TKIP, WPA2-CCMP (AES), WPA2-TKIP  |
| 802.11w:   | Provides origin authentication, integrity, confidentiality and replay protection of management frames for Motorola's AP300 access point   |
| IPSec VPN gateway:   | Supports DES, 3DES and AES-128 and AES-256 encryption, with site-to-site and client-to-site VPN capabilities; supports 1,024 concurrent IPSEC tunnels per switch — 12,288 per cluster   |
| Secure guest access (Hotspot provisioning):  | Local Web based authentication; URL redirection for user login; customizable login/welcome pages; support for external authentication/billing systems, usage-based charging   |
| Wireless RADIUS Support (Standard and Motorola Vendor Specific Attributes):  | User Based VLANs (Standard)<br>MAC Based Authentication (Standard)<br>User Based QoS (Motorola VSA)<br>Location Based Authentication (Motorola VSA)<br>Allowed ESSIDs (Motorola VSA)  |
| NAC support with third party systems from Microsoft and Symantec   |   |
| <b>Real Time Locationing System (RTLS)</b>   |   |
| RSSI based triangulation for Wi-Fi assets  |   |
| Tags supported:  | Ekahau, Aer Scout, Newbury, Gen 2 Tags  |
| RFID support:  | Compliant with LLRP protocol. Built-in support for the following Motorola RFID readers: fixed (XR440, XR450, XR480; mobile (RD5000) and handheld (MC9090-G RFID)  |
| <b>Optimized Wireless QoS</b>  |   |
| RF priority:   | 802.11 traffic prioritization and precedence  |
| Wi-Fi Multimedia extensions:   | WMM-power save with TSPEC Admission Control; WMM U-APSD   |
| IGMP snooping:   | Optimizes network performance by preventing flooding of the broadcast domain  |

|  |  |
|--|--|
| SIP Call Admission Control:  | Controls the number of active SIP sessions initiated by a wireless VoIP phone  |
| 802.11k:   | Provides radio resource management to improve client throughput (11k client required)  |
| Classification and marking:  | Layer 1-4 packet classification; 802.1p VLAN priority; DiffServ/TOS  |
| <b>System Resiliency and Redundancy</b>  |  |
| Active:Standby; Active:Active and N+1 redundancy with access port and MU load balancing; Critical resource monitoring  |  |
| Virtual IP: Single virtual IP (per VLAN) for a switch/controller cluster to use as the default gateway by mobile devices or wired infrastructure   |  |
| SMART RF: Network optimization to ensure user quality of experience at all times by dynamic adjustments to channel and power (on detection of RF interference or loss of RF coverage/neighbor recovery)  |  |
| Dual Firmware bank supports Image Failover capability  |  |
| <b>System Extensibility</b>  |  |
| ExpressCard™ Slot:   | Driver support for 3G wireless cards for WAN backhaul <ul style="list-style-type: none"><li>• AT&amp;T (NALA) — Option GT Ultra Express</li><li>• Verizon (NALA) — Verizon Wireless V740 Express Card</li><li>• Vodaphone (EMEA) — Novatel Merlin XU870</li><li>• Vodaphone (EMEA) — Vodaphone E3730 3G Expresscard</li><li>• Telstra (Australia) — Telstra Turbo 7 series Expresscard (Aircard 880E)</li><li>• General Use (NALA/APAC) — Novatel Merlin XU870</li></ul> |
| PCI-X interface  |  |
| <b>Management</b>  |  |
| Command line interface (serial, telnet, SSH); secure Web-based GUI (SSL) for the wireless switch and the cluster; SNMP v1/v2/v3; SNMP traps—40+ user configurable options; Syslog; TFTP Client; secure network time protocol (SNTP); text-based switch configuration files; DHCP (client/server/relay), switch auto-configuration and firmware updates with DHCP options; multiple user roles (for switch access); MIBs (MIB-II, Etherstats, wireless switch specific monitoring and configuration); Email notifications for critical alarms; MU naming capability |  |
| <b>Physical Characteristics</b>  |  |
| Form factor:   | 1U Rack Mount  |
| Dimensions:  | 1.75 in. H x 17.32 in. W x 15.39 in. D<br>44.45 mm H x 440 mm W x 390.8 mm D   |
| Weight:  | 14 lbs./6.35 kg  |
| Physical interfaces:   | 1x Uplink Port -10/100/1000 Cu/ Gigabit SFP interface<br>8x 10/100/1000 Cu Ethernet Ports with 29.7 Watts PoE, 802.3af and 802.3at Draft<br>1x 10/100 Management Interface (OOB port)<br>1x USB 2.0 Host<br>1x ExpressCard™ Slot (in USB mode)<br>1X PCI-X Interface<br>1x Serial Port (RJ45 style)  |
| MTBF:  | >65,000 Hours  |
| <b>Power Requirements</b>  |  |
| AC input voltage:  | 90 – 264 VAC 50/60 Hz  |
| Max AC input current:  | 6A@115 VAC, 3A@230 VAC   |
| Input frequency:   | 47 Hz to 63 Hz   |
| <b>User Environment</b>  |  |
| Operating temperature:   | 32° F to 104° F /0° C to 40° C   |
| Storage temperature:   | -40° F to 158° F/-40° C to 70° C   |
| Operating humidity:  | 5% to 85% (w/o condensation)   |
| Storage humidity:  | 5% to 85% (w/o condensation)   |
| Heat dissipation:  | 665 BTU per hour   |
| <b>Regulatory</b>  |  |
| Product safety:  | UL / cUL 60950-1, IEC / EN60950-1  |
| EMC compliance:  | FCC (USA), Industry Canada, CE (Europe), VCCI (Japan), C-Tick (Australia/New Zealand)  |
| <b>Recommended Enterprise Mobility Services</b>  |  |
| Customer Services:   | Service from the Start Advance Exchange Support  |



**MOTOROLA**

motorola.com

Part number SS-RFS6000. Printed in USA 09/09. MOTOROLA and the Stylized M Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2009 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.





[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

Get in touch with us  
on social media!

