

TSC


The Smarter Choice.

CELEBRATING 20 YEARS



TTP-268M SERIES – Industrial Thermal Transfer Bar Code Printer

MORE VALUE, MORE FEATURES, HIGHER RELIABILITY

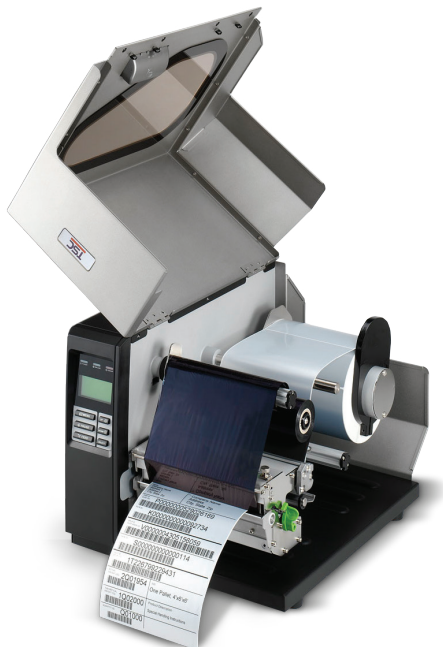

KEY FEATURES

- High quality die cast aluminum design
- 203 dpi and 300 dpi models
- Ethernet, USB 2.0, serial and parallel connectivity are standard.
- 32 MB SDRAM, 8 MB Flash
- SD Flash card memory expands storage to 4 GB
- Powerful 32 bit 200 MHz RISC processor
- Standard industry emulations right out of the box including Eltron® and Zebra® language support
- PS/2 keyboard interface for stand-alone or data entry at print site

APPLICATIONS

- Compliance Labeling For Shipping & Receiving
- Pallet Labeling
- Inventory Control Labeling
- Drum Labeling
- Warning Labels
- Custom Signage
- Brand Marketing Featuring Graphics, Logos & Texts
- Multiple-up Labels (two or three labels across)

TTP-268M – Industrial Thermal Transfer Bar Code Printer

PRINTER MODEL	TTP-268M	TTP-366M
Resolution	8 dots/mm (203 DPI)	12 dots/mm (300 DPI)
Printing method	Thermal Transfer & Direct Thermal	
Max. print speed	203 mm (8")/second	152 mm (6")/second
Max. print width	168 mm (6.61")	168 mm (6.61")
Max. print length	14,732 mm (580")	6,604 mm (260")
Enclosure	Die-cast aluminum frame/Metal cover with large clear media view window	
Physical dimension	355 mm (W) x 337 mm (H) x 510 mm (D) 13.98" (W) x 13.27" (H) x 20.08" (D)	
Weight	23 kg (50.71 lbs)	
Label roll capacity	208.3 mm (8.2") OD	
Ribbon	450 meter long, max. OD 81 mm, 1" core (Ink coated outside/inside)	
Ribbon width	50.8 mm ~ 178 mm (2" ~ 7")	
Processor	32-bit RISC CPU	
Memory	<ul style="list-style-type: none"> • 8 MB Flash memory • 32 MB SDRAM • SD Flash memory card reader for Flash memory expansion, up to 4 GB 	
Interface	<ul style="list-style-type: none"> • RS-232 • Centronics • USB 2.0 • PS/2 keyboard • Internal Ethernet, 10/100 Mbps • USB host, for scanner or PC keyboard (factory option) • GPIO (factory option) • Bluetooth (user option) • External 802.11 b/g/n wireless (user option) 	
Power	Internal universal switching power supply <ul style="list-style-type: none"> • Input: AC 100-240V, 5.5A, 47-63Hz • Output: DC 24V, 14.58A, 350W 	
LCD	Graphic type, 128 x 64 pixel, with back light	
Operation switch, button	1 power switch, 6 buttons (Menu, Pause, Feed, Up, Down, Select)	
Sensors	<ul style="list-style-type: none"> • Transmissive gap sensor (position adjustable) • Black mark reflective sensor (position adjustable) • Ribbon end sensor • Head open sensor 	
Real time clock	Standard	
Internal fonts	<ul style="list-style-type: none"> • 8 alpha-numeric bitmap fonts • Monotype Imaging® true type font engine with one CG Triumvirate Bold Condensed scalable font 	
Bar code	<ul style="list-style-type: none"> • 1D bar code Code 39, Code 93, Code 128UCC, Code 128 subsets A,B,C, Codabar, Interleave 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11 • 2D bar code PDF-417, Maxicode, DataMatrix, QR code, Aztec 	
Font and barcode rotation	0, 90, 180, 270 degree	
Printer language	TSPL-EZ™ (Compatible to EPL, ZPL, ZPL II)	
Media type	Continuous, die-cut, fan-fold, tag, notched, black mark (outside wound)	
Media width	50.8 ~ 172.7 mm (2" ~ 6.8")	
Media thickness	0.06 ~ 0.254 mm (2.36 ~ 10 mil)	
Media core diameter	76.2 mm (3")	
Label length	10 ~ 14,732 mm (0.39" ~ 580")	10 ~ 6,604 mm (0.39" ~ 260")
Environment condition	Operation: 5 ~ 40°C, 20 ~ 85% non-condensing Storage: -40 ~ 60°C, 10 ~ 90% non-condensing	
Safety regulation	FCC Class A, CE Class A, CCC	
Environmental concern	Comply with RoHS, WEEE	
Accessories	<ul style="list-style-type: none"> • Windows labeling software CD disk • Quick start guide • USB cable • Power cord • Ribbon paper core 	
Limited warranty	<ul style="list-style-type: none"> • Printer: 2 years • Print head: 25 km (1 million inches) or 12 months which comes first • Platen: 50 km (2 million inches) or 12 months which comes first 	
Factory options	• GPIO interface	
Dealer options	<ul style="list-style-type: none"> • Peel-off kit (include internal rewind & peel off module) • Heavy duty cutter (full cut) 	
User options	<ul style="list-style-type: none"> • Bluetooth module (serial interface) • 802.11 b/g/n wireless module (serial interface) • KP-200 Plus keyboard display unit • KU-007 Plus programmable smart keyboard 	



CORPORATE HEADQUARTERS

TSC Auto ID Technology Co., Ltd.
 Tel: +886 2 2218 6789
 E-mail: printer_sales@tscprinters.com

LI ZE PLANT

TSC Auto ID Technology Co., Ltd.
 Tel: +886 3 990 6677
 E-mail: printer_sales@tscprinters.com

AMERICAS

TSC Auto ID Technology America Inc. Corporate Office
 Tel: +1 909 525 9779
 E-mail: sales@tscprinters.com

Orlando Office

Tel: +1 407 704 8918
 E-mail: sales@tscprinters.com

CANADA

TSC Auto ID Technology America Inc.
 Tel: +1 909 525 9779
 E-mail: sales@tscprinters.com

MEXICO

TSC Mexico Representative Office
 Tel: +52 (33) 3836 6682
 E-mail: sales@idc-componentes.com

BRAZIL

TSC Brazil Representative Office
 Tel: +55 (11) 9597 8098
 E-mail: sales@tscprinters.com

EMEA

TSC Auto ID Technology EMEA GmbH
 Tel: +49 (0) 8106 37979 00
 E-mail: info@tsceu.com

RUSSIA

TSC Auto ID Technology EMEA GmbH
 Tel: +7 915 422 8889
 E-mail: info@tsceu.com

MIDDLE EAST

TSC Auto ID Technology ME Ltd, FZE
 Tel: +971 4 2533 069
 E-mail: info@tscmea.com

ASIA PACIFIC

TSC Auto ID Technology Co., Ltd.
 Tel: +886 2 2218 6789
 E-mail: printer_sales@tscprinters.com

CHINA

Tianjin TSC Auto ID Technology Co., Ltd.
 Tel: +86 22 5981 6661
 E-mail: sale@tscprinters.com.cn

TSC is a trademark of TSC Auto ID Technology Co., Ltd.
 TSC Auto ID Technology Co., Ltd. is an ISO 9001/14001 registered company.
 © 2013 TSC Auto ID Technology Co., Ltd.
 Product models and Specifications are subject to change without notice.
 Contact your TSC sales representative for specific information.



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

Get in touch with us
on social media!

