

# THE NEW MS910 POCKET SCANNER




## THE MS910 . COMPACT. FAST. RELIABLE.

Unitech launched its ultra compact barcode reader the MS910, which is being recognized as the smallest and most elegant design in its class. The MS910 is an "out of the box" data collection solution as well as a stylish accessory. It provides the convenience of wireless technology with the simplicity of a single-button scanning, which makes barcode data collection simple, reliable and efficient for all users.

- Truly pocket size, 2.5" long and less than an ounce
- Aggressive linear imager scan engine
- Bluetooth compatible with iOS, Android & Windows
- Ultra compact rugged design

### Available Model:

MS910-CUBB00-SG \$250 (List)  
MS910, 1D Linear Imager, Bluetooth, USB Cable

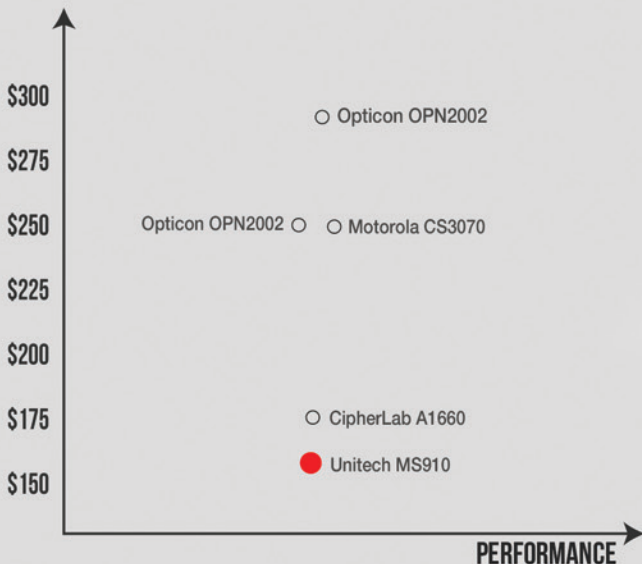

### FIELD SALES

Merchandising  
Delivery  
Order Fulfillment  
Account Management



### RETAIL / SUPPLY CHAIN

Inventory  
Document Tracking  
Proof of Delivery



### FACILITIES MANAGEMENT

Inspection  
Asset Tracking

# THE NEW MS910 POCKET SCANNER



## OPTICAL & PERFORMANCE

Receiving Device	CCD Module
Light Source	Visible LED 625 nm
Max. Resolution	5mil (0.127mm)
Scan Rate	240 scans/second
Printing Contrast Scale	30% Minimum
Sensor	Linear CMOS
Ambient Light	10,000 Lux (Fluorescent Light)
Reading Distance (DOF PCS=90%)	15mm to 60mm (Code 39, 5mil) 30mm to 140mm (Code 39, 13mil) 35mm to 185mm (Code 39, 20mil)

\*dependent on width of bar code

## ELECTRICAL

Operation Voltage	3.7VDC ± 5%
Current Consumption	Operation mode:<150mA; Standby mode:<65mA
Battery Type	Lithium-ion
Battery Duration	5000 reads/charge

## FUNCTIONALITY

Symbologies	UPC-A/UPC-E, EAN-8/EAN-13, Industrial 2 of 5, Codabar, Matrix 2 of 5, Code 11, Code 93, Code 32, Code 128, Standard Code 39, Full ASCII Code 39, Interleaved 2 of 5, China Postal Code, MSI Plessey Code, UK Plessey Code, EAN/UCC 128, Telepen Code, IATA Code, GS1 Databar.
Configuration Method	Configuration barcodes

## ENVIRONMENTAL

Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 60°C
Relative Humidity	20% to 85% non-condensing
ESD Protection	Functional after 4KV Contact and 8KV Air
Drop Test	5-foot drop threshold

## COMMUNICATION

Range	10M (line of sight)
Interface/Profile	SPP, HID
Wireless Class	Wireless Class 2

\* Compatible with Windows, Windows Mobile, Android, and iOS smart phones, tablets, and any device that is Bluetooth enabled.

## MECHANICAL

Housing Material	ABS
Dimensions	2.5"L x 0.9"W x 0.7"D
Weight	0.9 ounces

## IN-THE-BOX

USB Cable  
Wristband

## REGULATORY APPROVALS

CE, FCC ClassB

## WARRANTY

1 year

## COMPATIBLE WITH:



Windows 8

iOS

All trademarks are copyright of their respective owners.



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

