
PCIE-1620 PCIE-1622

8-port RS-232 PCI Express Communication Card 8-port RS-232/422/485 PCI Express **Communication Card**

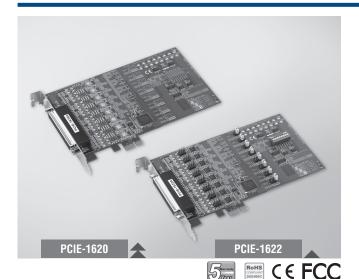

Features

- PCI Express bus 1.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 8 x RS-232 or RS- 232/422/485 ports
- Operating systems supported: Windows 2000/XP/Vista/7, and Linux 2.4/2.6
- OXPCle958 UART with 128-byte FIFOs standard

Introduction

PCIE-1620 is an 8-port RS-232, and PCIE-1622 is an 8-port RS-232/422/485 PCI Express communication cards that are compatible with the PCI Express x 1 specification. The cards provide eight EFT protected ports up to 2,500 V_{DC}, and have many functions such as high transmission speed of 921.6 kbps; either eight independent RS-232 ports or eight independent RS-232/422/485 ports which comes with high-performance PCle958 UARTs with 128-byte FIFO to reduce CPU load. Thus, the PCIE-1620/ PCIE-1620 are especially suitable for making your system reliable in multitasking environments.

Specifications

General

Bus Type PCI Express bus 1.0 compliant

 Bus Interface PCI Express x1 CE. FCC class A Certification Connectors 1x Female DB62

Dimensions (L x W) 185 x 100 mm (7.3" x 3.9") - Power Consumption 260 mA @ +3.3 V

Communications

- Comm. Controller 0xPCle958 Data Bits 5, 6, 7, 8

 Data Signals RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

128 bytes FIF0

 Flow Control RTS/CTS, Xon/Xoff Parity

None, Odd, Even, Mark and Space

50 bps ~ 921.6 kbps and any other baud rate setting Speed 230.4 kbps (PCIE-1620B and PCIE-1622B only)

Stop Bits 1, 1.5, 2

Protection

 ESD Protection 8KV (air), 4KV (contact)

 EFT Protection 1 KV Surge Protection 1 KV

Software

 Bundled Software ICOM Tools

OS Support Windows 2000/XP/Vista/7 and Linux

Environment

 Operating Humidity 5 ~ 95 % RH. non-condensing **Operating Temperature** $-10 \sim 60^{\circ}\text{C} (14 \sim 140^{\circ}\text{F})$ ■ Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

 PCIE-1620B 8-port RS-232 PCI Express Comm. Card w/Surge PCIE-1622B 8-port RS-232/422/485 PCI Express Comm. Card w/ Surge

Accessories

 OPT8H DB62 x 1 to DB9 x 8 Cable, 1m



www.L-TronDirect.com 800-830-9523 info@L-Tron.com

